

01/17/02

1-22-02

JC07 Rec PCT/PTO 17 JAN 2002

PCT

\$

FORM PTO-1390 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

UDV

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

10/031462INTERNATIONAL APPLICATION NO.
PCT/IL99/00394INTERNATIONAL FILING DATE
July 18, 1999

PRIORITY DATE CLAIMED

TITLE OF INVENTION

CENTRAL-INK SUPPLY SYSTEM FOR MULTI-PRINTER SYSTEMS

APPLICANT(S) FOR DO/EO/US

Benzion LANDA et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Amendments to the claims of the International Application under PCT Article 34 are transmitted herewith as annexes to the IPEA.

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.492 (a) (1) - (5)) : <div style="font-size: 1.2em; font-weight: bold;">10/031462</div>	INTERNATIONAL APPLICATION NO. <div style="font-weight: bold;">PCT/IL99/00394</div>	ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold;">UDV</div>
--	---	---

24. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO	\$1040.00
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO	\$890.00
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO	\$740.00
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4)	\$710.00
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4)	\$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (c)).

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	46 - 20 =	26	x \$18.00	\$468.00
Independent claims	7 - 3 =	4	x \$84.00	\$336.00
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00
TOTAL OF ABOVE CALCULATIONS =				\$1,694.00
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00
SUBTOTAL =				\$1,694.00
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00
TOTAL NATIONAL FEE =				\$1,694.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00
TOTAL FEES ENCLOSED =				\$1,694.00
				Amount to be: refunded \$
				charged \$

CALCULATIONS PTO USE ONLY

a. ☐ A check in the amount of _____ to cover the above fees is enclosed.

b. ☒ Please charge my Deposit Account No. 03-3419 in the amount of \$1,694.00 to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 03-3419. A duplicate copy of this sheet is enclosed.


d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

William H. Dippert, Esq.
Cowan, Liebowitz and Latman, P.C.
1133 Avenue of the Americas
New York, NY 10036-6799

Tel: (212) 790-9200



SIGNATURE

Maier FENSTER

NAME

41,016

REGISTRATION NUMBER

January 17, 2002

DATE

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: B. LANDA, et al.
Serial Number: Not Yet Assigned
Filed: 18 July 1999 as PCT/IL99/00394 and Herewith as US National Stage
For: CENTRAL-INK SUPPLY SYSTEM FOR MULTI-PRINTER SYSTEMS
Art Unit: Not Yet Assigned
Examiner: Not Yet Assigned

Honorable Commissioner of Patents and Trademarks
Washington DC 20231

PRELIMINARY AMENDMENT

Sir:

Further to the concurrent filing of the U.S. national stage of PCT/IL99/00394, kindly
mend the application as follows prior to examination:

IN THE SPECIFICATION

Kindly add the following section, on page 1, immediately after the title:

--RELATED APPLICATIONS

The present application is a U.S. national application of PCT/IL99/00394, filed 18 July
999.--

IN THE CLAIMS

Kindly amend claims 5, 8, 9, 11, 12, 17, 19, 20, 21, 23, 25, 31, 32, 34, 36, 38, 39, 40 and
41, in accordance with the following clean claims:

5. (Amended) A system according to claim 3 wherein:

the central source of toner concentrate comprises a central container of toner concentrate,
containing a concentrate of the same color as a liquid-toner contained in a liquid-toner reservoir
of the imaging apparatus; and

the toner concentrate conduit is a branching feed line comprising:

a junction having an input port and a plurality of output ports;

a line connecting the source with the input port; and

a plurality of lines, each connecting one of the output ports with a different one of
the imaging apparatus.

8. (Amended) A system according to claim 3 wherein the at least one toner-concentrate pump comprises a high-viscosity pump.

9. (Amended) A system according to claim 3 wherein the imaging apparatus are multi-colored and comprising a plurality of central sources of toner concentrate, each having a different color of toner concentrate.

11. (Amended) A system according to claim 3 wherein each liquid-toner reservoir comprises a particle density measurement device that measures a quantity related to the density of toner particles in the liquid toner and sends the measurements to the at least one controller and wherein the at least one controller transfers toner concentrate to the liquid toner reservoir responsive to the measurements.

2. (Amended) A system according to claim 3 wherein:

each of the printing apparatus includes:

a carrier-liquid reservoir from which carrier liquid is supplied to the liquid-toner reservoir; and

at least one local carrier liquid conduit through which carrier liquid is supplied to the liquid-toner reservoir, responsive to commands from the at least one controller; and

the system includes:

a central source of carrier liquid; and

a central carrier liquid conduit which carries the carrier liquid to individual ones of the carrier liquid reservoirs responsive to commands from the at least one controller.

17. (Amended) A system according to claim 15 wherein the central carrier-liquid conduit comprises a branching carrier-liquid feed line, comprising:

a proximal end at the central source of carrier liquid; and

distal ends at the imaging apparatus.

19. (Amended) A system according to claim 17 wherein:

the carrier-liquid conduit comprises a pump; and

the pump is controlled by the at least one controller.

20. (Amended) A system according to claim 15 wherein:

each carrier-liquid reservoir comprises a carrier-liquid level indicator; and
measurements of the carrier-liquid level indicator are sent to the at least one controller.

21. (Amended) A system according to claim 15 wherein each imaging apparatus comprises a conductivity measurement device that measures the conductivity of liquid toner in the liquid toner reservoir; and including:

a source of charge director solution; and

at least one charge director solution conduit that communicates between the source of charge director solution and the at least one carrier liquid conduit, wherein a quantity of charge director solution is sent to the reservoir responsive to a low conductivity measurement.

23. (Amended) A system according to or claim 22 wherein, in transferring the charge director to the reservoir, the controller is operative to transfer the quantity of charge director solution to a local carrier liquid conduit from which it is carried by a subsequent transfer of carrier liquid to the reservoir.

25. (Amended) A system according to claim 22 wherein the quantity of charge director solution sent to the liquid toner reservoir is substantially less than the quantity of carrier liquid sent to the reservoir.

31. (Amended) A system according to [any of claims 27-30] claim 27 wherein:

the imaging apparatus are multi-colored; and

a liquid-toner inlet line comprises a plurality of liquid-toner inlet lines.

32. (Amended) A system according to claim 27 wherein the central source of liquid toner is multi-colored, comprising a plurality of central containers of liquid toner of different colors.

34. (Amended) A system according to claim 27 and including:

a central source of carrier liquid; and

a carrier liquid conduit that connects the central source to the individual imaging apparatus,

wherein the at least one controller is operative to transfer carrier liquid from the central source of carrier liquid to the individual imaging apparatus as required by the apparatus for cleaning.

36. (Amended) A system according to claim 34 and including a carrier liquid return conduit that collects carrier liquid after use by the imaging device and transfers it to the central source of carrier liquid.

38. (Amended) A system according to claim 1 wherein the imaging apparatus comprise electrostatographic imaging apparatus.

39. (Amended) A system according to claim 1 wherein the imaging apparatus comprise electrophotographic apparatus.

40. (Amended) A system according to claim 1 wherein the imaging apparatus comprise printers.

41. (Amended) A system according to claim 1 wherein the imaging apparatus comprise copiers.

REMARKS


The present application is a U.S. national application of PCT/IL99/00394. The present amendments, based on the original claims, and, to the extent that the claims have been amended in the international stage, on the claims attached to the IPER, have been made to place the application in proper US form. The application contains claims 1-46.

Applicants note that the claims (except for claim 22 which was not examined) were indicated as meeting the criteria of PCT Article 33(2)-33(4) in the IPER issued by the European Patent Office (acting as IPEA).

A marked-up copy of the amended claims is attached hereto, for reference. An action on the merits is respectfully awaited.

Respectfully submitted,
B. LANDA, et al.

December 31, 2001
William H. Dippert, Esq.
Cowan, Liebowitz and Latman, P.C.
1133 Avenue of the Americas
New York, NY 10036-6799
Tel: (212) 790-9200


Paul FENSTER
Reg. No. 33,877

Marked-Up Amended Claims

5. (Amended) A system according to claim 3 [or 4] wherein:

the central source of toner concentrate comprises a central container of toner concentrate, containing a concentrate of the same color as a liquid-toner contained in a liquid-toner reservoir of the imaging apparatus; and

the toner concentrate conduit is a branching feed line comprising:

a junction having an input port and a plurality of output ports;

a line connecting the source with the input port; and

a plurality of lines, each connecting one of the output ports with a different one of the imaging apparatus.

8. (Amended) A system according to [any the claims 3-7] claim 3 wherein the at least one toner-concentrate pump comprises a high-viscosity pump.

9. (Amended) A system according to [any of claims 3-8] claim 3 wherein the imaging apparatus are multi-colored and comprising a plurality of central sources of toner concentrate, each having a different color of toner concentrate.

11. (Amended) A system according to [any of claims 3-10] claim 3 wherein each liquid-toner reservoir comprises a particle density measurement device that measures a quantity related to the density of toner particles in the liquid toner and sends the measurements to the at least one controller and wherein the at least one controller transfers toner concentrate to the liquid toner reservoir responsive to the measurements.

12. (Amended) A system according to [any of claims 3-11] claim 3 wherein:

each of the printing apparatus includes:

a carrier-liquid reservoir from which carrier liquid is supplied to the liquid-toner reservoir; and

at least one local carrier liquid conduit through which carrier liquid is supplied to the liquid-toner reservoir, responsive to commands from the at least one controller; and

the system includes:

a central source of carrier liquid; and

a central carrier liquid conduit which carries the carrier liquid to individual ones of the carrier liquid reservoirs responsive to commands from the at least one controller.

17. (Amended) A system according to [any of claims 12, 15 or 16] claim 15 wherein the central carrier-liquid conduit comprises a branching carrier-liquid feed line, comprising:

a proximal end at the central source of carrier liquid; and
distal ends at the imaging apparatus.

19. (Amended) A system according to claim 17 [or claim 18] wherein:

the carrier-liquid conduit comprises a pump; and
the pump is controlled by the at least one controller.

20. (Amended) A system according to [any of claims 12 or 15-19] claim 15 wherein:

each carrier-liquid reservoir comprises a carrier-liquid level indicator; and
measurements of the carrier-liquid level indicator are sent to the at least one controller.

21. (Amended) A system according to [any of claims 12 or 15-20] claim 15 wherein each imaging apparatus comprises a conductivity measurement device that measures the conductivity of liquid toner in the liquid toner reservoir; and including:

a source of charge director solution; and
at least one charge director solution conduit that communicates between the source of charge director solution and the at least one carrier liquid conduit, wherein a quantity of charge director solution is sent to the reservoir responsive to a low conductivity measurement.

23. (Amended) A system according to [claim 21 or] claim 22 wherein, in transferring the charge director to the reservoir, the controller is operative to transfer the quantity of charge director solution to a local carrier liquid conduit from which it is carried by a subsequent transfer of carrier liquid to the reservoir.

25. (Amended) A system according to [any of claims 21-24] claim 22 wherein the quantity of charge director solution sent to the liquid toner reservoir is substantially less than the quantity of carrier liquid sent to the reservoir.

31. (Amended) A system according to [any of claims 27-30] claim 27 wherein:
the imaging apparatus are multi-colored; and
a liquid-toner inlet line comprises a plurality of liquid-toner inlet lines.
32. (Amended) A system according to [any of claims 27-31] claim 27 wherein the central source of liquid toner is multi-colored, comprising a plurality of central containers of liquid toner of different colors.
34. (Amended) A system according to [any of claims 27-33] claim 27 and including:
a central source of carrier liquid; and
a carrier liquid conduit that connects the central source to the individual imaging apparatus,
wherein the at least one controller is operative to transfer carrier liquid from the central source of carrier liquid to the individual imaging apparatus as required by the apparatus for cleaning.
36. (Amended) A system according to claim 34 [or claim 35] and including a carrier liquid return conduit that collects carrier liquid after use by the imaging device and transfers it to the central source of carrier liquid.
38. (Amended) A system according to [any of the preceding claims] claim 1 wherein the imaging apparatus comprise electrostatographic imaging apparatus.
39. (Amended) A system according to [any of the preceding claims] claim 1 wherein the imaging apparatus comprise electrophotographic apparatus.
40. (Amended) A system according to [any of the preceding claims] claim 1 wherein the imaging apparatus comprise printers.
41. (Amended) A system according to [any of the preceding claims] claim 1 wherein the imaging apparatus comprise copiers.

CENTRAL-INK SUPPLY SYSTEM FOR MULTI-PRINTER SYSTEMS**FIELD OF THE INVENTION**

The present invention relates generally to multi-printer facilities of at least two imaging apparatus (such as printing or copying machines) and in particular, to liquid-toner replenishment systems for multi-printer facilities.

BACKGROUND OF THE INVENTION

Liquid toner for imaging apparatus (such as printing or copying machines) generally contains carrier liquid, toner particles and a minute amount of charge director. Generally, each color of liquid toner is stored in a reservoir from which it is fed to a printing engine for developing images. For good quality printing, proper balance of the three liquid-toner components should be maintained within a narrow band. Depletion of the liquid-toner components is dependent on factors such as the number of prints, the percent of ink coverage of each image and other factors. However, these affect each component differently and each component of the liquid toner depletes at a different rate.

In some prior art systems, replenishment is carried out separately with respect to each component of the liquid toner.

Toner particles are generally replenished in the form of toner concentrate, having a relatively high percentage of particles in liquid carrier. In general, a measurement of the optical density of the liquid toner in the reservoir reveals that the concentration of toner particles has fallen below a predetermined level and that replenishment of toner particles is required.

Carrier liquid is added whenever the liquid toner level in the reservoir falls below a certain level.

Charge director may be added to the toner concentrate. Alternatively or additionally, it may be added to the carrier liquid. Alternatively or additionally, it may be supplied in a separate charge director solution. Charge director is added when the conductivity of the liquid toner is below a predetermined value.

In some systems toner concentrate is replenished from discrete replaceable cartridges, located within the imaging apparatus. Cartridge replacement involves machine down-time and operator attention. Both these factors are costly and inconvenient.

Automatic replenishment of toner concentrate, carrier liquid and charge directors are known.

US patent 5,231,454, "Charge Director Replenishment System and Method for a Liquid Toner Developing Apparatus," the disclosure of which is incorporated herein by

reference, describes an automatic replenishment system for all three liquid toner components, for single, multicolor, imaging apparatus.

US patent 4,860, 924, "Liquid Developer Charge Director Control," the disclosure of which is incorporated herein by reference, describes another system of automatic replenishment for all three components of the liquid toner, wherein again, the replenishment system is individual for single, multicolor, imaging apparatus.

US patent 5,655,194 "Dispenser Apparatus Especially for Liquid Toner Concentrate," the disclosure of which is incorporated herein by reference, describes apparatus for dispensing liquid-toner concentrate and a container for the liquid-toner concentrate for single, multicolor, imaging apparatus. The system is further described in US patent 5,558,900 "Liquid Developer System," and US patent 5,148,222 "Liquid Developer System," the disclosures of which are incorporated herein by reference.

Other liquid developer assemblies are described in US patent 5,557,376, the disclosure of which is incorporated herein by reference.

Exemplary forms of optical density measurement systems (to determine the need for replenishment of toner-concentrate) are shown in US patents 4,579,253; 4,860,924; 5,793,490; and 5,570,193 the disclosures of all of which are incorporated herein by reference.

An exemplary form of conductivity measurement system (to determine the need for replenishment of charge-director solution) is shown in US patent 4,860,924 the disclosure of which is incorporated herein by reference.

SUMMARY OF THE INVENTION

According to an aspect of some preferred embodiments of the present invention toner is replenished in individual imaging apparatus in a multi-printer facility from a central toner replenishment system.

In some preferred embodiments of the present invention, the central toner replenishment system comprises a central supply system for toner concentrate.

Preferably, where the multi-printer facility is single-color, the central supply system of toner concentrate comprises one tank of toner concentrate and each imaging apparatus has one liquid-toner reservoir. Preferably, where the multi-printer facility comprises multicolor imaging apparatus or a mixture of multicolor and single-color imaging apparatus, the central supply system of toner concentrate comprises as many as four and possibly more tanks of toner concentrate, one for each color, and the multicolor imaging apparatus comprises as many as four and possibly more corresponding liquid-toner reservoirs each.

In some preferred embodiments of the present invention, each liquid-toner reservoir is replenished with toner concentrate directly from the central system. Alternatively, each liquid-toner reservoir comprises a toner-concentrate dispenser can which dispenses toner concentrate to the reservoir, on demand. Preferably, the toner-concentrate dispenser can is continuously replenished from the central system.

An aspect of some preferred embodiments of the present invention is that a multi-printer facility of at least two imaging apparatus comprises a central system of carrier liquid, supplying the individual imaging apparatus.

In preferred embodiments according to this aspect, the liquid-toner reservoirs of the imaging apparatus draw the carrier-liquid directly from the central system and have no carrier-liquid reservoirs. Alternatively, each imaging apparatus has its own carrier-liquid reservoir, which is replenished from the central system, on demand, when the level in the apparatus carrier-liquid reservoir falls below a given value.

In some preferred embodiments of the invention, the central system of carrier liquid supplies carrier liquid for cleaning purposes as well. In preferred embodiments, as described below, in which the individual imaging apparatus have no separate liquid-toner reservoirs, carrier liquid from the central system is supplied only for cleaning purposes.

An aspect of some preferred embodiments of the present invention is that a multi-printer facility of at least two imaging apparatus comprises a central liquid-toner system that supplies the liquid-toner working solution to the individual imaging apparatus, as required.

In preferred embodiments of this aspect, the imaging apparatus draw the liquid-toner working solution for each color directly from the central system and have no liquid toner reservoirs themselves.

Preferably, where the multi-printer facility comprises only single-color imaging apparatus, the central system comprises a single reservoir of liquid-toner working solution. Preferably, where the multi-printer facility comprises multicolor imaging apparatus or a mixture of multicolor and single-color imaging apparatus, the central system comprises as many as four or more reservoirs of liquid-toner working solutions, one for each color.

An aspect of some preferred embodiments of the present invention is that replenishment of charge director to a liquid-toner reservoir is made indirectly, on demand, by adding charge director to a carrier-liquid line just prior to replenishment of carrier liquid to a specific reservoir. This aspect is applicable to multi-printer facilities having central systems of liquid toner and carrier liquid as well as to facilities in which carrier liquid is supplied to each local liquid-toner reservoir from a local carrier liquid reservoir.

In preferred embodiments of this aspect, the carrier-liquid flow, for example, of the order of 50 milliliters per replenishment, is used to carry the charge-director, which is minute, for example, of the order of a few milliliters, from the carrier liquid line to the liquid toner reservoir. In addition to assuring that the proper amount of charge director reaches the reservoir, this method also purges the carrier liquid line so that no excess charge director is supplied to the reservoirs later.

There is thus provided, in accordance with a preferred embodiment of the invention, a multi-printer system comprising:

a plurality of imaging apparatus, each said apparatus comprising at least one liquid-toner reservoir, containing liquid toner;

a central source of toner concentrate;

a toner concentrate conduit which connects the central source to the individual imaging apparatus; and

at least one toner-concentrate pump which pumps the toner concentrate from the central source to the individual imaging apparatus.

In a preferred embodiment of the invention, the imaging apparatus each comprise:

a toner-concentrate dispenser which dispenses toner concentrate to said liquid-toner reservoir,

wherein the toner concentrate conduit connects the central source to the toner concentrate dispenser, such that toner concentrate is transferred from the central source to the toner concentrate dispenser via the toner concentrate conduit.

Preferably, the system comprises at least one controller.

Preferably, the toner concentrate dispenser comprises a dispenser can; and the can dispenses toner concentrate into the reservoir in response to a command from the at least one controller.

Preferably, the central source of toner concentrate comprises a central container of toner concentrate, containing a concentrate of the same color as a liquid-toner contained in a liquid-toner reservoir of the imaging apparatus; and the toner concentrate conduit is a branching feed line comprising: a junction having an input port and a plurality of output ports; a line connecting the source with the input port; and a plurality of lines, each connecting one of the output ports with a different one of the imaging apparatus.

Preferably, a toner-concentrate pump is located on each line connecting the source with an input port. Preferably, the toner-concentrate pump operates continuously. Preferably, the at least one toner-concentrate pump comprises a high-viscosity pump.

In a preferred embodiment of the invention, in the imaging apparatus are multi-colored and the system comprises a plurality of central sources of toner concentrate, each having a different color of toner concentrate. Preferably, the plurality of liquid-toner reservoirs comprises liquid-toner reservoirs of at least yellow, magenta and cyan toner.

5 In a preferred embodiment of the invention, each liquid-toner reservoir comprises a particle density measurement device that measures a quantity related to the density of toner particles in the liquid toner and sends the measurements to the at least one controller and wherein the at least one controller transfers toner concentrate to the liquid toner reservoir responsive to the measurements.

10 Preferably, each of the printing apparatus includes:

- a carrier-liquid reservoir from which carrier liquid is supplied to the liquid-toner reservoir; and

- at least one local carrier liquid conduit through which carrier liquid is supplied to the liquid-toner reservoir, responsive to commands from the at least one controller; and

15 the system includes:

- a central source of carrier liquid; and

- a central carrier liquid conduit which carries the carrier liquid to individual ones of the carrier liquid reservoirs responsive to commands from the at least one controller.

20 There is further provided, in accordance with a preferred embodiment of the invention, a multi-printer system comprising:

- a plurality of imaging apparatus, each said apparatus comprising a liquid-toner reservoir;

- a central source of carrier liquid;

- at least one controller; and

25 a central carrier-liquid conduit which connects the central source of carrier liquid to each of the imaging apparatus and carries carrier liquid to the individual apparatus responsive to a command from the at least one controller.

30 Preferably, the imaging apparatus includes: a carrier-liquid reservoir from which carrier liquid is supplied to the liquid-toner reservoir, wherein the central carrier liquid conduit carries the carrier liquid to individual ones of the carrier liquid reservoirs responsive to commands from the at least one controller.

Preferably, the central carrier-liquid conduit comprises a branching carrier-liquid feed line, comprising: a proximal end at the central source of carrier liquid; and distal ends at the imaging apparatus.

Preferably, the branching carrier-liquid feed line comprises valves at its distal ends; and the valves are controlled by the at least one controller.

Preferably, the carrier-liquid conduit comprises a pump; and the pump is controlled by the at least one controller.

5 Preferably, each carrier-liquid reservoir comprises a carrier-liquid level indicator; and measurements of the carrier-liquid level indicator are sent to the at least one controller.

Preferably, each imaging apparatus comprises a conductivity measurement device that measures the conductivity of liquid toner in the liquid toner reservoir; and the system includes:

10 a source of charge director solution; and

at least one charge director solution conduit that communicates between the source of charge director solution and the at least one carrier liquid conduit, wherein a quantity of charge director solution is sent to the reservoir responsive to a low conductivity measurement.

15 There is further provided, in accordance with a preferred embodiment of the invention, a printer system comprising:

at least one liquid toner reservoir, each said reservoir including a first detector that provides a first signal when the amount of liquid toner therein falls below a given volume and a second detector that measures the conductivity of the liquid toner and produces a second signal responsive thereto;

20 a source of carrier liquid;

a source of charge director solution;

at least one controller;

at least one carrier liquid conduit that communicates between the source of carrier liquid and the at least one liquid toner reservoir;

25 at least one charge director solution conduit that communicates between the source of charge director solution and the at least one carrier liquid conduit,

wherein the controller is operative to transfer a first quantity of carrier liquid to a liquid toner reservoir via the charge director conduit when the first signal associated with the reservoir indicates a low volume condition for the reservoir and is operative to send a second quantity of charge director solution to the reservoir via the charge-director and carrier-liquid conduits, responsive to the second signal associated with the reservoir indicating a low conductivity condition.

Preferably, in transferring the charge director to the reservoir, the controller is operative to transfer the quantity of charge director solution to the local carrier conduit which

charge director solution is then carried by a subsequent transfer of carrier liquid to the reservoir. Preferably, the controller is operative to send the charge director solution to the local carrier liquid conduit immediately prior to sending carrier liquid to the reservoir such that the carrier liquid carries the charge director into the reservoir.

5 In a preferred embodiment of the invention, the quantity of charge director solution sent to the liquid toner reservoir is substantially less than the quantity of carrier liquid sent to the reservoir.

Preferably, the charge director conduit joins the carrier liquid conduit near an entrance to the reservoir from the carrier liquid conduit.

10 There is further provided, in accordance with a preferred embodiment of the invention, a multi-printer system comprising:

a plurality of imaging apparatus, each said apparatus comprising:

a printing engine

15 a liquid-toner inlet line from which fresh liquid toner is fed to the printing engine;

a central source of liquid toner;

a liquid-toner feed which connects the central source to the liquid-toner inlet line;

at least one controller which transfers fresh liquid toner from the central source, via said feed.

20 Preferably, each imaging apparatus includes:

a liquid-toner exhaust line which collects discharged liquid toner from the printing engine and delivers it to the central source.

Preferably, the liquid-toner feed is a branching feed line comprising:

a junction;

25 a first feed line connecting the central source with the junction; and

a plurality of second feed lines connecting the junction with respective liquid-toner inlet lines of the imaging apparatus.

Preferably each of said plurality of feed lines includes a valve controlled by the at least one controller.

30 Preferably, the imaging apparatus are multi-colored; and a liquid-toner inlet line comprises a plurality of liquid-toner inlet lines.

Preferably, the central source of liquid toner is multi-colored, comprising a plurality of central containers of liquid toner of different colors. Preferably, the plurality of liquid-toner containers comprises liquid-toner containers of at least yellow, magenta and cyan toner.

In a preferred embodiment of the invention, the system includes:

a central source of carrier liquid; and

a carrier liquid conduit that connects the central source to the individual imaging apparatus, wherein the at least one controller is operative to transfer carrier liquid from the central source of carrier liquid to the individual imaging apparatus as required by the apparatus for cleaning.

Preferably, the system includes a carrier-liquid pump that pumps carrier-liquid to respective imaging apparatus responsive to commands from said at least one controller.

Preferably, the system includes a carrier liquid return conduit that collects carrier liquid after use by the imaging device and transfers it to the central source of carrier liquid.

Preferably, the system includes a separator that removes toner particles from the collected carrier liquid prior to its delivery to the central source of carrier liquid.

There is further provided, in accordance with a preferred embodiment of the invention, a multi-printer system comprising:

a plurality of imaging apparatus,

a central source of carrier liquid;

at least one controller;

a central carrier-liquid conduit which connects the central source of carrier liquid to each of the imaging apparatus and carries carrier liquid to the individual apparatus responsive to a command from the at least one controller.

Preferably, the system includes a carrier-liquid exhaust line which collects discharged carrier liquid from the imaging apparatus and returns it to the central source of carrier liquid.

Preferably, the imaging apparatus comprise electrostatographic imaging apparatus.

Preferably, the imaging apparatus comprise electrophotographic apparatus.

In a preferred embodiment of the invention, the imaging apparatus comprise printers. In a preferred embodiment of the invention, the imaging apparatus comprise copiers.

There is further provided, in accordance with a preferred embodiment of the invention, a method of dispensing toner concentrate in a multi-printer facility comprising a plurality of imaging apparatus, each said apparatus comprising a liquid toner reservoir, the method comprising:

providing a central source of toner concentrate; and

automatically transferring toner concentrate from said central source to individual imaging apparatus.

In a preferred embodiment of the invention, transferring comprises transferring toner

concentrate directly to a liquid-toner reservoir of the individual imaging apparatus, in response to a deficiency of toner concentrate in the reservoir.

5 In a preferred embodiment of the invention, transferring comprises transferring toner concentrate to a liquid-toner concentrate dispenser associated with a liquid-toner reservoir in the individual imaging apparatus.

There is further provided, in accordance with a preferred embodiment of the invention, a method of providing liquid toner in a multi-printer facility comprising a plurality of imaging apparatus, comprising:

10 providing a central source of liquid toner; and
automatically transferring liquid toner from said central source to individual imaging apparatus in response to a need of liquid toner in said imaging apparatus.

15 There is further provided, in accordance with a preferred embodiment of the invention, a method of providing carrier liquid in a multi-printer facility comprising a plurality of imaging apparatus, comprising: providing a central source of carrier liquid; and automatically transferring carrier liquid from said central source to individual imaging apparatus in response to a need of carrier liquid in said imaging apparatus.

BRIEF DESCRIPTION OF THE DRAWINGS

20 The present invention will be more clearly understood from the following detailed description of the preferred embodiments of the invention and from the attached drawings, in which same number designations are maintained throughout the figures for the same element and in which:

Fig. 1A is a schematic block diagram of a multi-printer facility, in accordance with a preferred embodiment of the present invention;

25 Fig. 1B is a schematic block diagram of multicolor, electrostatic, imaging apparatus, in accordance with a preferred embodiment of the present invention;

Fig. 1C is a schematic block diagram of a central replenishment system in accordance with a preferred embodiment of the present invention;

30 Figs. 2A and 2B are side sectional illustrations of a liquid-toner concentrate dispenser can in two operative positions, in accordance with a preferred embodiment of the present invention;

Fig. 3 is a schematic illustration of a liquid-toner reservoir, in accordance with a preferred embodiment of the invention;

Fig. 4A is a schematic block diagram of another multi-printer facility, in accordance with a preferred embodiment of the present invention;

Fig. 4B is a schematic block diagram of another multicolor, electrostatic, imaging apparatus, in accordance with a preferred embodiment of the present invention;

Fig. 4C is a schematic block diagram of another central supply system in accordance with a preferred embodiment of the present invention;

5 Fig. 5A is a schematic block diagram of still another multi-printer facility, in accordance with a preferred embodiment of the present invention;

Fig. 5B is a schematic block diagram of still another multicolor, electrostatic, imaging apparatus, in accordance with a preferred embodiment of the present invention; and

10 Fig. 5C, is a schematic block diagram of still another central system in accordance with a preferred embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Reference is now made to Figs. 1A, 1B and 1C, which are schematic block diagrams of a multi-printer facility 100, in accordance with a preferred embodiment of the present invention. Fig. 1A illustrates multi-printer facility 100, which comprises a central system 110 in communication with 3 multicolor, electrostatic, imaging apparatus 120A, 120B and 120C via feed lines 112. Fig. 1B illustrates single imaging apparatus 120A. Fig. 1C illustrates central system 110.

Fig. 1B is a schematic block diagram of multicolor, electrostatic, imaging apparatus 120A in accordance with a preferred embodiment of the present invention. Preferably, imaging apparatus 120A comprises an image bearing surface, typically embodied in a rotating photoconductive drum 10. Associated with photoconductive drum 10 is photoconductor charging apparatus 11. Also associated with photoconductive drum 10 is imaging apparatus 12, for example, a laser scanner, for providing a desired latent image on drum 10. The latent image normally includes image areas at a first electrical potential and background areas at another electrical potential.

Photoconductive drum 10, photoconductor charging apparatus 11 and imaging apparatus 12 may be any suitable drum, charging apparatus and imaging apparatus as are well known in the art. Preferred photoreceptors, are, for example, those described in US Patent 5,376,491 or in PCT published application WO 96/07955. For example, charging apparatus as described in published PCT application WO 94/22059 or unpublished PCT application PCT/IL98/00553 may be used.

Preferably, associated with photoconductive drum 10 are an intermediate transfer member 20, a cleaning station 22 and an excess liquid removal assembly 18.

Intermediate transfer member 20, cleaning station 22 and excess liquid removal assembly 18, may be any suitable intermediate transfer member, cleaning station and excess liquid removal assembly as are well known in the art.

Intermediate transfer member 20 may be for example, one of the intermediate transfer members described in one of US Patents 5,089,856; 5,572,274; 5,410,392; 5,592,269; 5,745,829; PCT published PCT applications WO 97/07433; WO 98/55901; WO 96/13760; and unpublished PCT applications PCT/IL/98/00576; and PCT/IL98/00553. Preferred cleaning station, useful in the practice of the present invention are described in US patent 4,439,035 and unpublished PCT application PCT/IL98/00553, the disclosure of which is incorporated herein by reference. Pre-transfer excess liquid removal and discharge mechanisms useful in the present invention are described, for example, in US Patents 4,286,039; 5,276,492; 5,572,274; 5,166,734; 5,854,960.

In preferred embodiments of the invention a pre-transfer erase mechanism may be present, such as that described in US patent 5,166,734.

Preferably, intermediate transfer member 20 is arranged for electrostatic transfer of the image from the image-bearing surface. Intermediate transfer member 20 is preferably associated with a impression roller 24 for transfer of the image onto a further substrate 25, such as paper, preferably mounted on roller 24, preferably by heat and pressure.

Preferably, after developing each image in a given color, the developed single-color image is transferred to intermediate transfer member 20. Subsequent images in different colors are sequentially transferred onto intermediate transfer member 20. When all the desired images have been transferred thereto, the complete multicolor image is transferred from transfer member 20 to substrate 25. Therefore, impression roller 24 produces operative engagement between intermediate transfer member 20 and substrate 25 only when transfer of the composite image to substrate 25 takes place.

Alternatively, each single color image is transferred to the paper after its formation. In this case, the single color images are transferred seriatim to the paper. Alternatively, intermediate transfer member 20 is omitted and the developed single color images are transferred sequentially directly from drum 10 to substrate 25.

Preferably, cleaning station 22 receives supply of clear carrier liquid from a carrier liquid reservoir 32 via a supply conduit 33 and a carrier liquid pump 35. Preferably, the carrier liquid used by cleaning station 22 and drum 10 and is collected and returned to reservoir 32 through a conduit 37.

Preferably, the carrier liquid collected by excess liquid removal assembly 18 is returned to reservoir 32 through conduit 39.

In some preferred embodiments, a separator 30 is used to separate any toner particles from the used carrier liquid of conduits 37 and 39. Clean carrier liquid is supplied from separator 30 to carrier-liquid reservoir 32. Separator 30 may be any separator as known in the art. In some preferred embodiments, separator 30 is of the type described in US patent 4,985,732, the disclosure of which is incorporated herein by reference.

Alternatively or additionally, carrier liquid from reservoir 32 circulates continuously through a filtering system 34 comprising a pump 36 and a filter 38.

Alternatively or additionally, a filter (for example a 10 micron filter) is used after pump 35 to remove solid material in the carrier liquid. Preferably, a pressure drop across the filter is measured and the magnitude of the pressure is used as an indication of whether the filter should be replaced.

Also associated with photoconductive drum 10 is a multicolor liquid developer assembly 16 which includes a developer roller electrode 17, spaced from photoconductive drum 10 and preferably rotating in the same sense as drum 10. This rotation provides for the surfaces of drum 10 and roller 17 to have opposite velocities in their region of propinquity. Developer assembly 16 also includes multicolor, liquid-toner supply assembly 14, for providing colored toner to develop latent images on photoconductive drum 10.

In some preferred embodiments of the invention, multicolor, liquid-toner supply assembly 14 is a single-engine assembly which receives separate supplies of colored liquid toner from four different reservoirs 40, 42, 44 and 46, typically containing yellow, magenta, cyan and black liquid toners respectively. Four pumps 48 are provided at the entrances of the four supply conduits 56 for providing a desired amount of pressure to feed the colored liquid toner to a series of four spray nozzles 57. The colored liquid toners are collected into a series of four collection trays 65 and returned to the proper reservoirs through a series of four collection conduits 72. Preferred developer systems of the type described above, useful in the present invention are described, for example in US patents 5,028,964; 5,231,454; 5,289,238; 5,148,222; 5,255,058; 5,117,263 or published PCT application WO 96/29633, the disclosures of all of which are incorporated by reference. Preferably, toner of the general type described in US Patent 4,794,651 is desirable for use in the present invention. Moreover, US patents 4,980,259; 5,555,185; 5,047,306; 5,572,274; 5,410,392; 5,436,706; 5,225,306; 5,266,435; 5,610,694; 5,346,796; 5,737,666; 5,745,829; 5,908,729; 5,300,390; 5,264,313; and PCT published applications WO 92/17823; WO 95/04307; WO 96/01442; WO 96/01442; WO

96/13760; WO 96/26469; WO 96/31809, the disclosures of all of which are incorporated by reference, describe preferred toners and charge directors for use in the present invention. Alternative development systems, suitable for the present invention include those described in US patents 5,436,706; 5,610,694; 5,737,666 and in PCT published application WO 96/31809, 5 , the disclosures of all of which are incorporated by reference. Alternatively other toner and development systems, known in the art may be used.

However, the invention is not limited to a multicolor system of four colors. In some preferred embodiments, additional reservoirs containing additional colors, such as green, violet and/or orange, or special toners such as gold or silver may be added, each with its own 10 supply conduit, nozzle, pump and collection conduit. Nor is the invention limited to any specific construction shown (for this or its other embodiments). In particular, it should be understood that all liquid toner systems known in the art are generally suitable for use in the various embodiments of the invention and that the system described is used as an example, for convenience, since it is well known to the inventors.

15 Preferably, a controller 97 is associated with imaging apparatus 120A. Controller 97 preferably receives signals from indicators and measuring devices of imaging apparatus 120A and preferably controls all pumps and all valves of imaging apparatus 120A. However, to avoid cluttering the figure, no lines are shown connecting the controller to the other elements.

20 Preferably, associated with each liquid-toner reservoir 40, 42, 44 and 46, there are toner-concentrate dispenser units 74, for replenishing the liquid-toner reservoirs with toner concentrate when required. Dispenser units 74 are similar in design to the toner-concentrate dispenser can described in US patent 5,655,194 "Dispenser Apparatus Especially for Liquid Toner Concentrate," the disclosure of which is incorporated herein by reference.

25 However, in the prior art, dispenser cans used for replenishing the liquid-toner reservoirs were in themselves disposable, and their replacement is inconvenient. Whereas dispenser cans 74, of the embodiment of Fig. 1B, unlike the prior art, are refilled automatically from a central system.

Reference is now made to Figs. 2A and 2B which are schematic diagrams of refillable toner-concentrate dispenser can 74 in accordance with a preferred embodiment of the present 30 invention.

Preferably, dispenser can 74 comprises a housing 82 that is similar in construction to the housing of a commercially available aerosol spray can. Activation of an air pressure source 222, in response to a signal from controller 97, results in an ingress of pressurized air into a space 220, pressing against springs 219 and pushing down piston 91. In consequence,

piston 91 presses housing 82 against springs 211, thereby pushing in and opening spring-loaded valve 92. The liquid-toner concentrate inside housing 82 is continuously under constant, high pressure. Therefore, when valve 92 opens, a measured amount of toner concentrate is discharged from a space 96, via feed line 100, to a liquid toner reservoir such as reservoir 40. This open position is illustrated in Fig. 2A. After a predetermined time period, operation of air pressure source 222 is suspended, and pressurized air is removed from a region 220. The drop in air pressure within region 220 to the ambient air pressure, results in axial movement of housing 82 and piston 91 towards an end portion 208, due to the tension release effect of springs 211 and 219, thereby closing valve 92 and bringing can 74 to the closed position shown in Fig. 2B.

In a preferred embodiment of the invention, dispenser can 74 comprises a feed line 106 (shown on Figs. 2A, 2B and on Figs. 1B and 1C), through which dispenser can 74 is kept full of toner concentrate at high pressure. Preferably, line 106 is of a flexible material, at least near dispenser can 74, in order to accommodate the travel incurred by line 106 and housing 82 in the opening and closing of valve 92. Preferably, the toner concentrate in line 106 is constantly under high pressure by pump 136. In consequence, volume 96 of dispenser can 74 is likewise constantly under high pressure. Alternatively, but less preferably, line 106 has a valve, and dispenser can 74 is refilled at intervals, for example, at constant time intervals.

Reference is now made to Fig. 3 which schematically illustrates a reservoir 40 of imaging apparatus 120A, in accordance with a preferred embodiment of the invention, for example, containing yellow toner. Preferably, the other liquid-toner reservoirs are substantially identical in structure. Preferably, liquid-toner reservoir 40 comprises a device for measuring optical density 132, in order to determine if replenishment of toner concentrate is required. Preferably, device 132 is similar in design to any of the prior art designs described in the background section. Alternatively, device 132 may be any device for measuring concentration of toner particles in the liquid toner, as known in the art. Preferably, device 132 measures the optical density continuously. Alternatively, device 132 measures the optical density periodically. Preferably, device 132 sends signals to controller 97 indicating the optical density and by inference, the toner particle concentration. Preferably, when controller 97 receives a signal that yellow liquid-toner reservoir 40 requires replenishment of toner concentrate, it activates air pressure source 222, thereby opening valve 92 of feed line 100 of yellow toner-concentrate dispenser can 74 (shown also on Fig. 1B). In this manner, only a single reservoir, in this case, yellow liquid-toner reservoir 40, is replenished with toner concentrate from yellow dispenser can 74.

In preferred embodiments of the invention, the toner concentrate contains a pre-determined concentration of charge directors, generally less than that required for proper charging of the liquid toner.

Preferably, as shown in Fig. 1B, liquid-toner reservoirs 40, 42, 44 and 46 and carrier-liquid reservoir 32 are in communication with each other so that when the volume of liquid-toner in any reservoir is low, it is refilled from carrier liquid reservoir 32.

Preferably, as shown in Fig. 3, liquid-toner reservoirs 40 comprise a device 324, as known in the art, for measuring the level of liquid in a reservoir, in order to determine if an addition of carrier liquid is required. Preferably, device 324 measures the level of liquid continuously. Alternatively, device 324 measures the level of liquid periodically. Preferably, when the level of liquid in reservoir 40 is low, device 324 sends a signal to controller 97.

Preferably, as shown in Fig. 1B, when controller 97 receives a signal that yellow liquid-toner reservoir 40 requires replenishment of carrier liquid, it activates a pump 122 of a line 115, (which branches out to four lines 116 leading to the four liquid-toner reservoirs) and opens one of four valves 118 (on lines 116), in particular valve 118 associated with yellow reservoir 40, so that yellow reservoir 40 is replenished with carrier liquid.

Preferably, reservoir 32 also comprises a similar device 324. Preferably, when the level of liquid in reservoir 32 is low, device 324 of reservoir 32 sends a signal to controller 97 that refilling is required. Refilling from central system 110, via feed line 108 will be described below.

In a preferred embodiment of the invention, as shown in Fig. 1B, imaging apparatus 120A comprises a charge-director tank 125 for replenishing the liquid-toner reservoirs with charge director.

Preferably, as shown in Fig. 3, liquid-toner reservoir 40 comprises a device 206 for measuring the conductivity of the liquid toner in reservoir 40, in order to determine if replenishment of charge director is required. Preferably, device 206 measures the conductivity continuously. Alternatively, device 206 measures the conductivity periodically. Preferably, when the conductivity is low, device 206 sends a signal to controller 97.

Preferably, as shown in Fig. 1B, replenishment of charge director from tank 125 to the liquid-toner reservoirs is carried out in conjunction with replenishment of carrier liquid, because of the very minute quantity of charge director that is required. Preferably, when controller 97 receives a signal that yellow liquid-toner reservoir 40 requires replenishment of charge-director, it stores the information until it receives a signal that yellow liquid-toner reservoir 40 also requires replenishment of carrier liquid.

At that point, controller 97 activates a pump 124 of a line 123, (which branches out to four lines 126 leading to four carrier-liquid lines 116). . Controller 97 also opens one of the four valves 128, in particular, valve 128 associated with yellow reservoir 40. Replenishment of charge director is made to the one carrier-liquid line 116 that leads to yellow reservoir 40.

5 Controller 97 then activates pump 122 of line 115 and opens valve 118 of line 116 associated with yellow reservoir 40. In this manner, the flow of carrier liquid from reservoir 32 to yellow reservoir 40 carries with it the required amount of charge director to yellow reservoir 40. Preferably, the outlets of charge-director lines 126 to carrier-liquid lines 116 are very close to the outlets of carrier-liquid lines 116 to reservoirs 40-46. This is desirable since the quantity of

10 carrier liquid dispensed, while much greater than that of the charge director solution, is still relatively small. Such placement assures that all of the charge director solution is flushed from the feed lines and into the respective reservoir by the carrier liquid.

In some preferred embodiments, the outlets of charge-director lines 126 to carrier-liquid lines 116 is on the liquid-toner-reservoir sides of valves 118. Less preferably, the

15 outlets of charge-director lines 126 to carrier-liquid lines 116 is on the carrier-liquid-reservoir side of valves 118.

It should be understood that while the above automatic charge-director dispensing apparatus is described in the context of a local charge director dispenser, associated with individual imaging apparatus, this mechanism and method are equally applicable to a central

20 charge director dispensing system, as described below.

Reference is now made to Fig. 1C which is a schematic block diagram of central system 110 in communication with three imaging apparatus 120A, 120B and 120C, in accordance with a preferred embodiment of the present invention.

Preferably, central system 110 comprises four tanks 134 of toner concentrates for the

25 four respective colors. Preferably, associated with each tank there is a high viscosity pump 136 for high-viscosity materials such as Blagdon Hopper-type pump model 15-1/2". Preferably, associated with each tank are feed lines 106 to the four refillable dispenser can 74 of each imaging apparatus (shown on Fig. 1A).

As shown in Fig. 1C, central system 110 preferably further comprises a carrier-liquid

30 tank 140. Associated with the carrier liquid tank there is a pump 142, feed lines 108 to the carrier-liquid reservoirs of each imaging apparatus 120 and a valve 109, near the outlet to reservoir 32 of each imaging apparatus 120 (shown on Fig. 1A).

Preferably, central system 110 further comprises a controller 130 which receives signals and information from individual controllers 97 of each imaging apparatus 120 and

which controls pump 142 of central system 110 and valves 109 of each imaging apparatus 120. (To avoid cluttering the figure, no lines are shown connecting controller 130 to the other elements.)

Note that in the preferred embodiments, pumps 136 operate constantly, so that lines 106 and dispenser cans 74 are maintained at high pressure, constantly. Alternatively or additionally, central controller 130 and imaging apparatus controllers 97 work together in some other manner to control the pumps and valves of the central system and of the individual imaging apparatus. Alternatively or additionally, appropriate circuitry is used in place of or in addition to central controller 130 and imaging apparatus controllers 97.

Preferably, as device 324 of carrier-liquid reservoir 32 of imaging apparatus 120A sends a signal to imaging apparatus controller 97 that reservoir 32 is low in carrier liquid, controller 97 sends a signal to central controller 130 of central system 110.

Preferably, central controller 130 activates pump 142 of carrier-liquid tank 140 and opens valve 109 of carrier-liquid feed line 108. In this manner, carrier-liquid reservoir 32 of imaging apparatus 120A is replenished with carrier liquid.

Note that, except for central feed lines 106, central feed line 108 and valve 109, imaging apparatus 120A is similar to any prior art imaging apparatus. Thus, imaging apparatus 120A may be any prior art liquid toner imaging apparatus that is fitted with central feed lines 106 and 108.

It should be noted that, while the embodiment of Figs. 1-3 include central supply of toner concentrate, carrier liquid and charge director, other preferred embodiments of the invention may have any one or two of these components supplied centrally and the other(s) supplied locally, at each printer. Furthermore, while the above embodiment shows toner concentrate delivered first from a central source to a local dispenser, in some preferred embodiments of the invention, the toner concentrate may be delivered directly to the liquid toner reservoirs. In preferred embodiments wherein the toner concentrate is delivered from the central system directly to the liquid toner reservoirs, each line 106 has a valve, and controller 97 opens the valve of a particular liquid-toner reservoir whenever replenishment of toner concentrate to that reservoir is required. Preferably, the valve is open for a predetermined interval, so as to control the amount of toner concentrate that is dispensed.

Reference is now made to Figs. 4A, 4B and 4C which are schematic block diagrams of a multi-printer facility 400 in accordance with another preferred embodiment of the present invention. Fig. 4A illustrates multi-printer facility 400 which comprises a central system 410 in communication with 3 identical multicolor, electrostatic, imaging apparatus 420A, 420B

and 420C via feed lines 412 and 414. Fig. 4B illustrates single imaging apparatus 420A. Fig. 4C illustrates central system 410.

Preferably, in system 400, imaging apparatus 420A, 420B and 420C do not have their own liquid-toner reservoirs. Rather, working liquid toner of the different colors is supplied directly from central system 410, via central feed lines 456 to spray nozzles 57. Preferably, four central pumps 448 are provided at the entrances of central feed lines 456 for providing a desired amount of pressure to feed the colored liquid toner to a series of spray nozzles 57 of imaging apparatus 420A. Preferably, the pumps work continuously and valves are provided at each unit, controlled by a local controller. Within imaging apparatus 420A, used liquid toner of the different colors is collected into a series of collection trays 65 and returned to the proper central reservoirs through a series of central collection conduits 472. Four central pumps 473 provide the desired amount of pressure to collect the colored liquid toners.

An advantage of this system over the embodiments of Figs. 1-3 is that the liquid toner is not subject to the environment within the imaging apparatus, for example, the heat that is generated by the printing or copying process. Rather, the liquid toner may be kept in a more easily controlled, more optimal environment

Preferably, central system 410 of colored liquid toner reservoirs is similar in design to the colored liquid-toner reservoirs of imaging apparatus 120A, and comprises a carrier-liquid reservoir 432 for replenishing liquid toner reservoirs 440, 442, 444 and 446 with carrier liquid. Preferably, central system 410 also comprises a charge-director tank 425 for replenishing the liquid toner reservoirs with charge director. Preferably, each of liquid-toner reservoirs 440, 442, 444 and 446 comprises a device 324 for measuring the liquid level within the reservoir. Preferably, each of the liquid-toner reservoirs comprises a device 206 for measuring the conductivity within each reservoir. Preferably, a controller 497 receives signals from the different measuring devices and controls pump 422 and valves 418 of carrier-liquid lines 416 and pump 424 and valves 428 of charge-director lines 426, in the same manner as described above.

In some preferred embodiments of the invention, central liquid toner reservoirs 440, 442, 444 and 446 are replenished with colored toner concentrate from dispenser cans 466 which comprise valves 492 and which may be similar in design to the dispenser cans described in US patent 5,655,194 "Dispenser Apparatus Especially for Liquid Toner Concentrate," the disclosure of which is incorporated herein by reference. Alternatively, central liquid toner reservoirs 440, 442, 444 and 446 are replenished with colored toner concentrate from a system of tanks such as toner-concentrate tanks 134 of Fig. 1C and pumps

such as heavy viscosity pumps 136 of Fig. 1C. Preferably, each of liquid-toner reservoirs 440, 442, 444 and 446 comprises device 132 for measuring the optical density of the liquid toner within the reservoir. Preferably, a controller 497 receives signals from device 132 and activates the valves necessary for the replenishment.

5 In some preferred embodiments, central system 410 comprises more than four colored liquid toner reservoirs and includes special colors, for example, gold or silver, metallic colors or other process colors such as purple, orange and (or) green.

Reference is now made to Figs. 5A, 5B and 5C which are schematic block diagrams of a multi-printer facility 500 in accordance with another preferred embodiment of the present invention. Fig. 5A illustrates multi-printer facility 500 which comprises a central system 510 in communication with 3 identical multicolor, electrostatic, imaging apparatus 520A, 520B and 520C via feed lines 512 and 514. Fig. 5B illustrates single imaging apparatus 520A. Fig. 5C illustrates central system 510.

Preferably, in system 500, imaging apparatus 520A does not have liquid-toner reservoirs. Furthermore, imaging apparatus 520A does not have a carrier-liquid reservoir. Imaging apparatus 520A receives working liquid toner and carrier liquid from central system 510. Preferably, working liquid toner is supplied to imaging apparatus 520A from central liquid toner reservoirs 540, 542, 544 and 546 via feed lines 556 and central pumps 548, as described with respect to Figs. 4A-4C. Preferably, used liquid toner is collected and returned to central system 510 via feed lines 572 and central pumps 573, as described with respect to 4A-4C. Preferably, carrier liquid is supplied to imaging apparatus 520A from central carrier-liquid reservoir 532 via feed line 533 and central pump 535. Preferably, carrier liquid is returned to central system 510 via feed line 537 and central pump 531. Preferably, the carrier liquid is passed through a central separator 530 before returning to central carrier-liquid reservoir 532. Alternatively or additionally, the carrier liquid of reservoir 532 is passed through a continuous filtering system comprising a filter 538 and a pump 534, or a filter at the output of the reservoir.

Preferably, central carrier-liquid reservoir 532 also replenishes central liquid toner reservoirs 540, 542, 544 and 546 with carrier liquid when necessary, as controlled by controller 597. This system operates in much the same way as the carrier liquid replenishment of Figs. 1-3.

Preferably, a central charge-director tank 525 replenishes central liquid toner reservoirs 540, 542, 544 and 546 with charge director when necessary, as controlled by

controller 597. This system operates in much the same way as the charge director replenishment of Figs. 1-3.

Preferably, central liquid toner reservoirs 540, 542, 544 and 546 comprises a toner-concentrate replenishment system as controlled by controller 597. This system operates in much the same way as the toner concentrate replenishment of Fig. 4B.

In some preferred embodiments, central system 510 comprises more than four colored liquid toner reservoirs and includes special colors, for example, gold or silver, metallic colors or other process colors such as purple, orange and (or) green.

The present invention is not limited to the specific systems described. Rather, any combination of the features that have been described may be used. Alternatively, some features that have been described may be left out. It should be noted that, while the embodiments of Figs. 1-3 include central supply of toner concentrate, carrier liquid and charge director, other preferred embodiments of the invention may have any one or two of these components supplied centrally and the other(s) supplied locally, at each printer. Furthermore, while the above embodiment shows toner concentrate delivered first from a central source to a local dispenser, in some preferred embodiments of the invention, the toner concentrate may be delivered directly to the liquid toner reservoirs.

The present invention has been described using non-limiting detailed descriptions of preferred embodiments thereof that are provided by way of example and are not intended to limit the scope of the invention. Variations of embodiments described will occur to persons of the art. In particular, while a specific liquid toner imaging apparatus utilizing specific elements has been used for illustrative purposes, the imaging apparatus, including the structure of a printing engine or engines used therein may be of any suitable kind. Since, in general, all or nearly all liquid toner imaging apparatus require replenishment of one or more of toner concentrate, carrier liquid and charge director, the present invention is applicable to such apparatus, even if not referenced or described herein. The terms "comprise," "include," and "have" or their conjugates, when used herein, mean "including but not necessarily limited to." The scope of the invention is limited only by the following claims:

CLAIMS

1. A multi-printer system comprising:
 - a plurality of imaging apparatus, each said apparatus comprising at least one liquid-
 - 5 toner reservoir, containing liquid toner;
 - a central source of toner concentrate;
 - a toner concentrate conduit which connects the central source to the individual imaging apparatus; and
 - at least one toner-concentrate pump which pumps the toner concentrate from the
 - 10 central source to the individual imaging apparatus.
2. A system according to claim 1 in which the imaging apparatus each comprise:
 - a toner-concentrate dispenser which dispenses toner concentrate to said liquid-toner
 - reservoir,
 - 15 wherein the toner concentrate conduit connects the central source to the toner concentrate dispenser, such that toner concentrate is transferred from the central source to the toner concentrate dispenser via the toner concentrate conduit.
3. A system according to claim 2 and comprising at least one controller.
- 20 4. A system according to claim 3, wherein:
 - the toner concentrate dispenser comprises a dispenser can; and
 - the can dispenses toner concentrate into the reservoir in response to a command from
 - the at least one controller.
 - 25
5. A system according to claim 3 or 4 wherein:
 - the central source of toner concentrate comprises a central container of toner
 - concentrate, containing a concentrate of the same color as a liquid-toner contained in a liquid-
 - toner reservoir of the imaging apparatus; and
 - 30 the toner concentrate conduit is a branching feed line comprising:
 - a junction having an input port and a plurality of output ports;
 - a line connecting the source with the input port; and
 - a plurality of lines, each connecting one of the output ports with a different
 - one of the imaging apparatus.

PDV A01

6. A system according to claim 5 wherein a toner-concentrate pump is located on each line connecting the source with an input port.

5 7. A system according to claim 6 wherein the toner-concentrate pump operates continuously.

8. A system according to any the claims 3-7 wherein the at least one toner-concentrate pump comprises a high-viscosity pump.

10

9. A system according to any of claims 3-8 wherein the imaging apparatus are multi-colored and comprising a plurality of central sources of toner concentrate, each having a different color of toner concentrate.

15 10. A system according to claim 9 wherein the plurality of liquid-toner reservoirs comprises liquid-toner reservoirs of at least yellow, magenta and cyan toner.

11. A system according to any of claims 3-10 wherein each liquid-toner reservoir comprises a particle density measurement device that measures a quantity related to the density of toner particles in the liquid toner and sends the measurements to the at least one controller and wherein the at least one controller transfers toner concentrate to the liquid toner reservoir responsive to the measurements.

20 12. A system according to any of claims 3-11 wherein:

25 each of the printing apparatus includes:

a carrier-liquid reservoir from which carrier liquid is supplied to the liquid-toner reservoir, and

at least one local carrier liquid conduit through which carrier liquid is supplied to the liquid-toner reservoir, responsive to commands from the at least one controller; and

30 the system includes:

a central source of carrier liquid; and

a central carrier liquid conduit which carries the carrier liquid to individual ones of the carrier liquid reservoirs responsive to commands from the at least one controller.

PDV A01

13. A multi-printer system comprising:
a plurality of imaging apparatus,
a central source of carrier liquid;
at least one controller;
- 5 a central carrier-liquid conduit which connects the central source of carrier liquid to each of the imaging apparatus and carries carrier liquid to the individual apparatus responsive to a command from the at least one controller.
14. A system according to claim 13 and including a carrier-liquid exhaust line which
10 collects discharged carrier liquid from the imaging apparatus and returns it to the central source of carrier liquid.
15. A system according to claim 13 wherein each said imaging apparatus comprises a liquid-toner reservoir.
- 15
16. A system according to claim 15 wherein the imaging apparatus includes:
a carrier-liquid reservoir from which carrier liquid is supplied to the liquid-toner reservoir,
wherein the central carrier liquid conduit carries the carrier liquid to individual ones of
20 the carrier liquid reservoirs responsive to commands from the at least one controller.
17. A system according to any of claims 12, 15 or 16 wherein the central carrier-liquid conduit comprises a branching carrier-liquid feed line, comprising:
a proximal end at the central source of carrier liquid; and
25 distal ends at the imaging apparatus.
18. A system according to claim 17 wherein:
the branching carrier-liquid feed line comprises valves at its distal ends; and
the valves are controlled by the at least one controller.
- 30
19. A system according to claim 17 or claim 18 wherein:
the carrier-liquid conduit comprises a pump; and
the pump is controlled by the at least one controller.

PDV A01

20. A system according to any of claims 12 or 15-19 wherein:
each carrier-liquid reservoir comprises a carrier-liquid level indicator; and
measurements of the carrier-liquid level indicator are sent to the at least one
controller.

5

21. A system according to any of claims 12 or 15-20 wherein each imaging apparatus
comprises a conductivity measurement device that measures the conductivity of liquid toner
in the liquid toner reservoir; and including:

a source of charge director solution; and

10 at least one charge director solution conduit that communicates between the source of
charge director solution and the at least one carrier liquid conduit, wherein a quantity of
charge director solution is sent to the reservoir responsive to a low conductivity measurement.

22. A printer system comprising:

15 at least one liquid toner reservoir, each said reservoir including a first detector that
provides a first signal when the amount of liquid toner therein falls below a given volume and
a second detector that measures the conductivity of the liquid toner and produces a second
signal responsive thereto;

a source of carrier liquid;

20 a source of charge director solution;

at least one controller;

at least one carrier liquid conduit that communicates between the source of carrier
liquid and the at least one liquid toner reservoir;

25 at least one charge director solution conduit that communicates between the source of
charge director solution and the at least one carrier liquid conduit,

wherein the controller is operative to transfer a first quantity of carrier liquid to a
liquid toner reservoir via the charge director conduit when the first signal associated with the
reservoir indicates a low volume condition for the reservoir and is operative to send a second
quantity of charge director solution to the reservoir via the charge-director and carrier-liquid
30 conduits, responsive to the second signal associated with the reservoir indicating a low
conductivity condition.

23. A system according to claim 21 or claim 22 wherein, in transferring the charge
director to the reservoir, the controller is operative to transfer the quantity of charge director

PDV A02

solution to a local carrier liquid conduit from which it is carried by a subsequent transfer of carrier liquid to the reservoir.

24. A system according to claim 23 wherein the controller is operative to send the charge director solution to the local carrier liquid conduit immediately prior to sending carrier liquid to the reservoir such that the carrier liquid carries the charge director into the reservoir.

25. A system according to any of claims 21-24 wherein the quantity of charge director solution sent to the liquid toner reservoir is substantially less than the quantity of carrier liquid sent to the reservoir.

26. A system according to claim 25 wherein the charge director conduit joins the carrier liquid conduit near an entrance to the reservoir from the carrier liquid conduit.

27. A multi-printer system comprising:

a plurality of imaging apparatus, each said apparatus comprising:

a printing engine

a liquid-toner inlet line from which fresh liquid toner is fed to the printing

engine;

a central source of liquid toner;

a liquid-toner feed which connects the central source to the liquid-toner inlet line;

at least one controller which transfers fresh liquid toner from the central source, via said feed.

28. A system according to claim 27 wherein each imaging apparatus includes:

a liquid-toner exhaust line which collects discharged liquid toner from the printing engine and delivers it to the central source.

29. A system according to claim 28 wherein the liquid-toner feed is a branching feed line comprising:

a junction;

a first feed line connecting the central source with the junction; and

a plurality of second feed lines connecting the junction with respective liquid-toner inlet lines of the imaging apparatus.

PDV A01

30. A system according to claim 29 wherein:

each of said plurality of feed lines includes a valve controlled by the at least one controller.

5

31. A system according to any of claims 27-30 wherein:

the imaging apparatus are multi-colored; and

a liquid-toner inlet line comprises a plurality of liquid-toner inlet lines.

10 32. A system according to any of claims 27-31 wherein the central source of liquid toner is multi-colored, comprising a plurality of central containers of liquid toner of different colors.

15 33. A system according to claim 32 wherein the plurality of liquid-toner containers comprises liquid-toner containers of at least yellow, magenta and cyan toner.

20 34. A system according to any of claims 27-33 and including:
a central source of carrier liquid; and
a carrier liquid conduit that connects the central source to the individual imaging apparatus,

wherein the at least one controller is operative to transfer carrier liquid from the central source of carrier liquid to the individual imaging apparatus as required by the apparatus for cleaning.

25 35. A system according to claim 34 and including a carrier-liquid pump that pumps carrier-liquid to respective imaging apparatus responsive to commands from said at least one controller.

30 36. A system according to claim 34 or claim 35 and including a carrier liquid return conduit that collects carrier liquid after use by the imaging device and transfers it to the central source of carrier liquid.

37. A system according to claim 36 and including a separator that removes toner particles from the collected carrier liquid prior to its delivery to the central source of carrier liquid.

PDV A01

38. A system according to any of the preceding claims wherein the imaging apparatus comprise electrostatographic imaging apparatus.

5 39. A system according to any of the preceding claims wherein the imaging apparatus comprise electrophotographic apparatus.

40. A system according to any of the preceding claims wherein the imaging apparatus comprise printers.

10

41. A system according to any of the preceding claims wherein the imaging apparatus comprise copiers.

15

42. A method of dispensing toner concentrate in a multi-printer facility comprising a plurality of imaging apparatus, each said apparatus comprising a liquid toner reservoir, the method comprising:

providing a central source of toner concentrate; and

automatically transferring toner concentrate from said central source to individual imaging apparatus.

20

43. A method according to claim 42 wherein transferring comprises transferring toner concentrate directly to a liquid-toner reservoir of the individual imaging apparatus, in response to a deficiency of toner concentrate in the reservoir.

25

44. A method according to claim 42 wherein transferring comprises transferring toner concentrate to a liquid-toner concentrate dispenser associated with a liquid-toner reservoir in the individual imaging apparatus.

30

45. A method of providing liquid toner in a multi-printer facility comprising a plurality of imaging apparatus, comprising:

providing a central source of liquid toner; and

automatically transferring liquid toner from said central source to individual imaging apparatus in response to a need of liquid toner in said imaging apparatus.

PDV A01

46. A method of providing carrier liquid in a multi-printer facility comprising a plurality of imaging apparatus, comprising:

providing a central source of carrier liquid; and

automatically transferring carrier liquid from said central source to individual imaging

5 apparatus in response to a need of carrier liquid in said imaging apparatus.

1/12

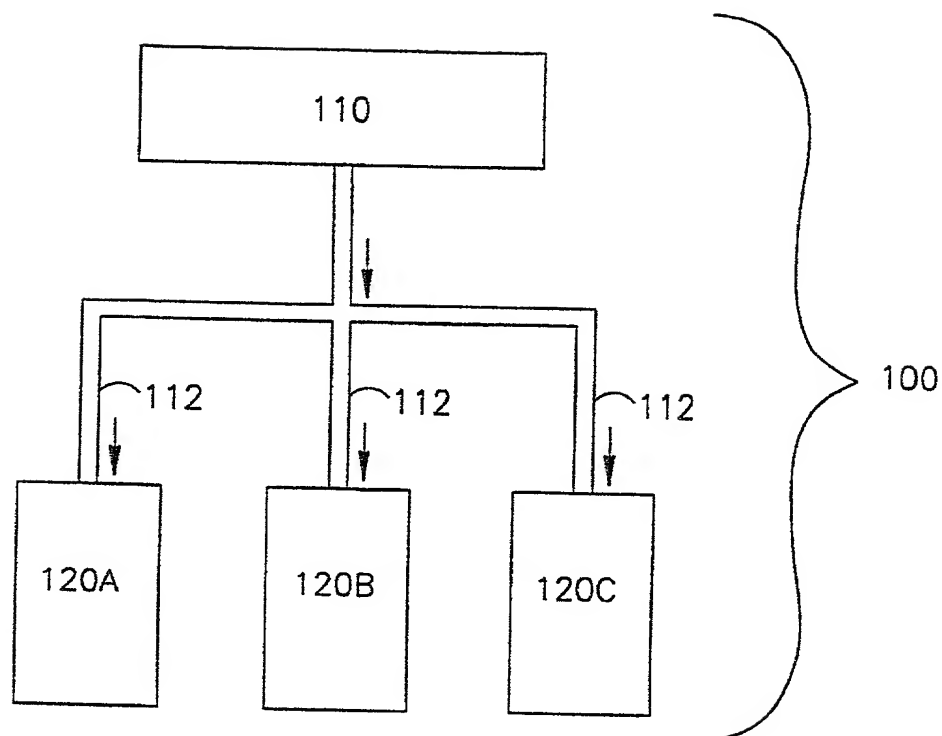


FIG.1A

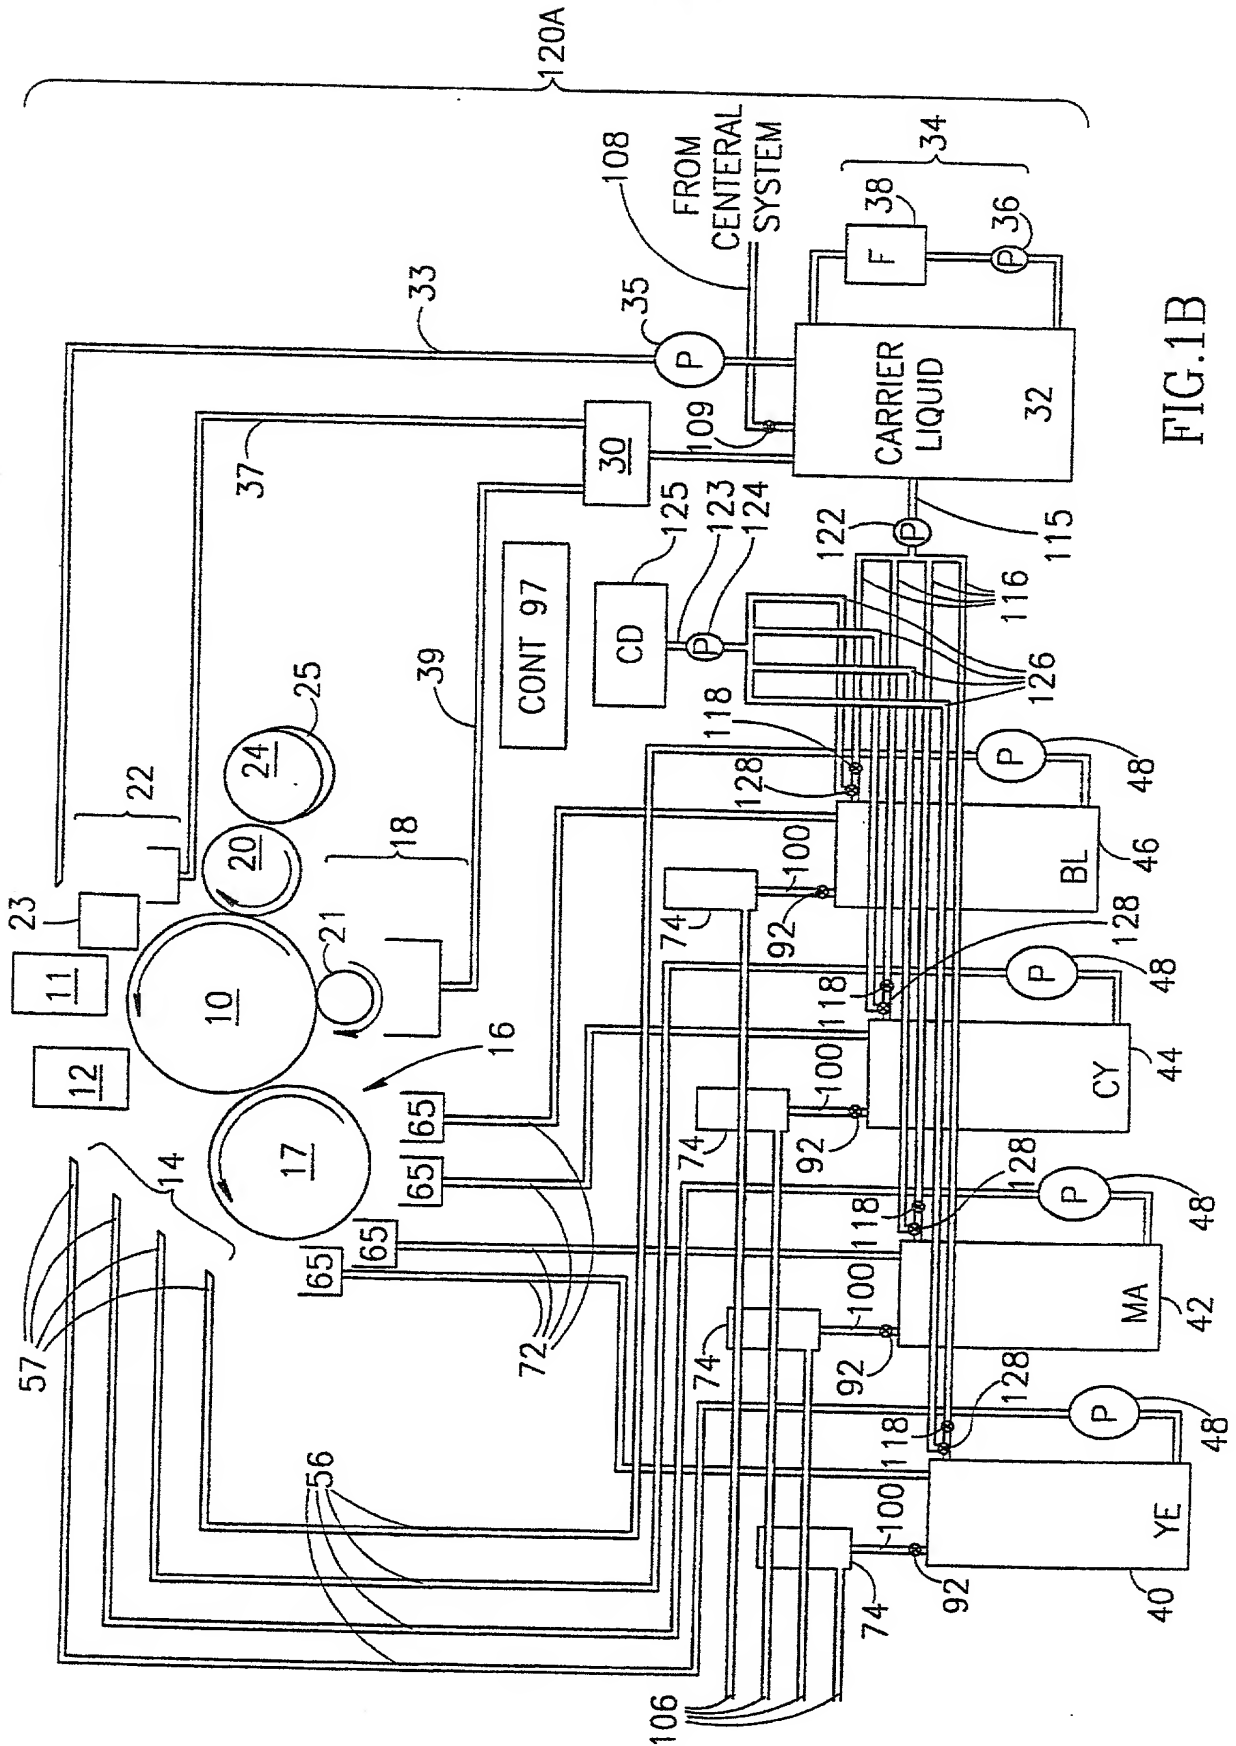


FIG.1B

3/12

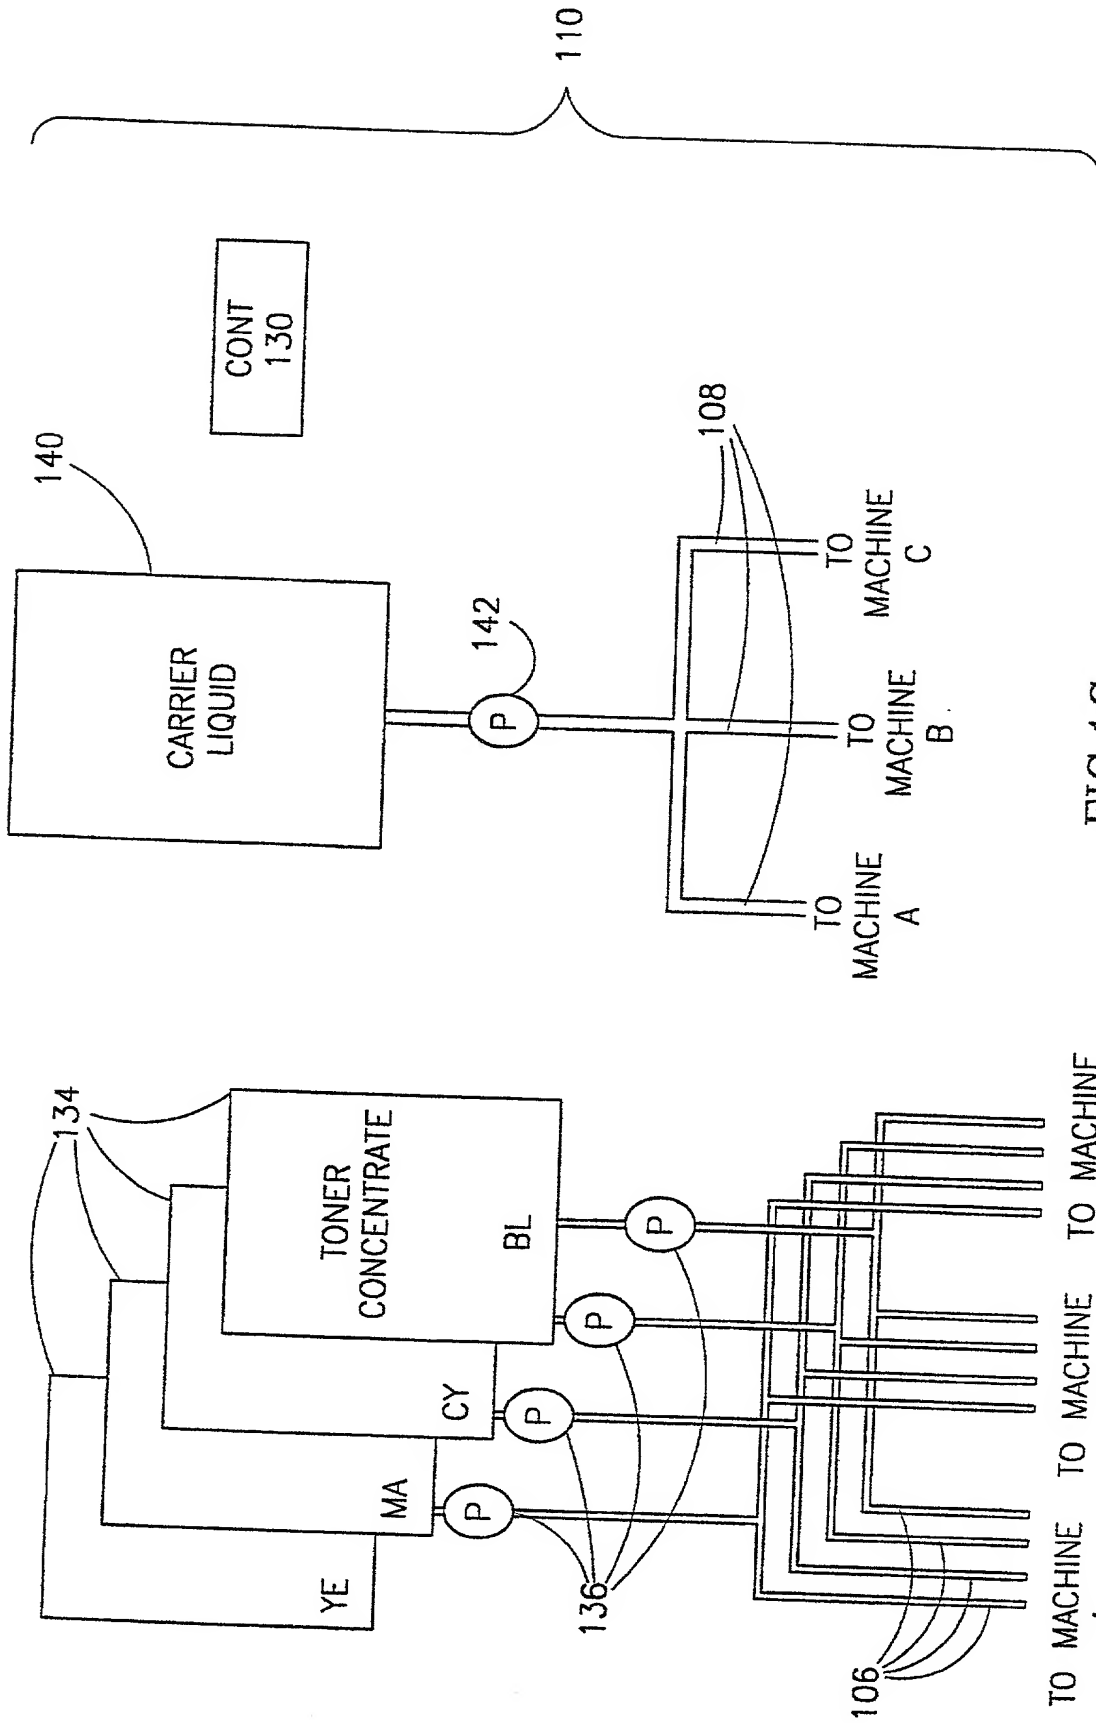


FIG.1C

4/12

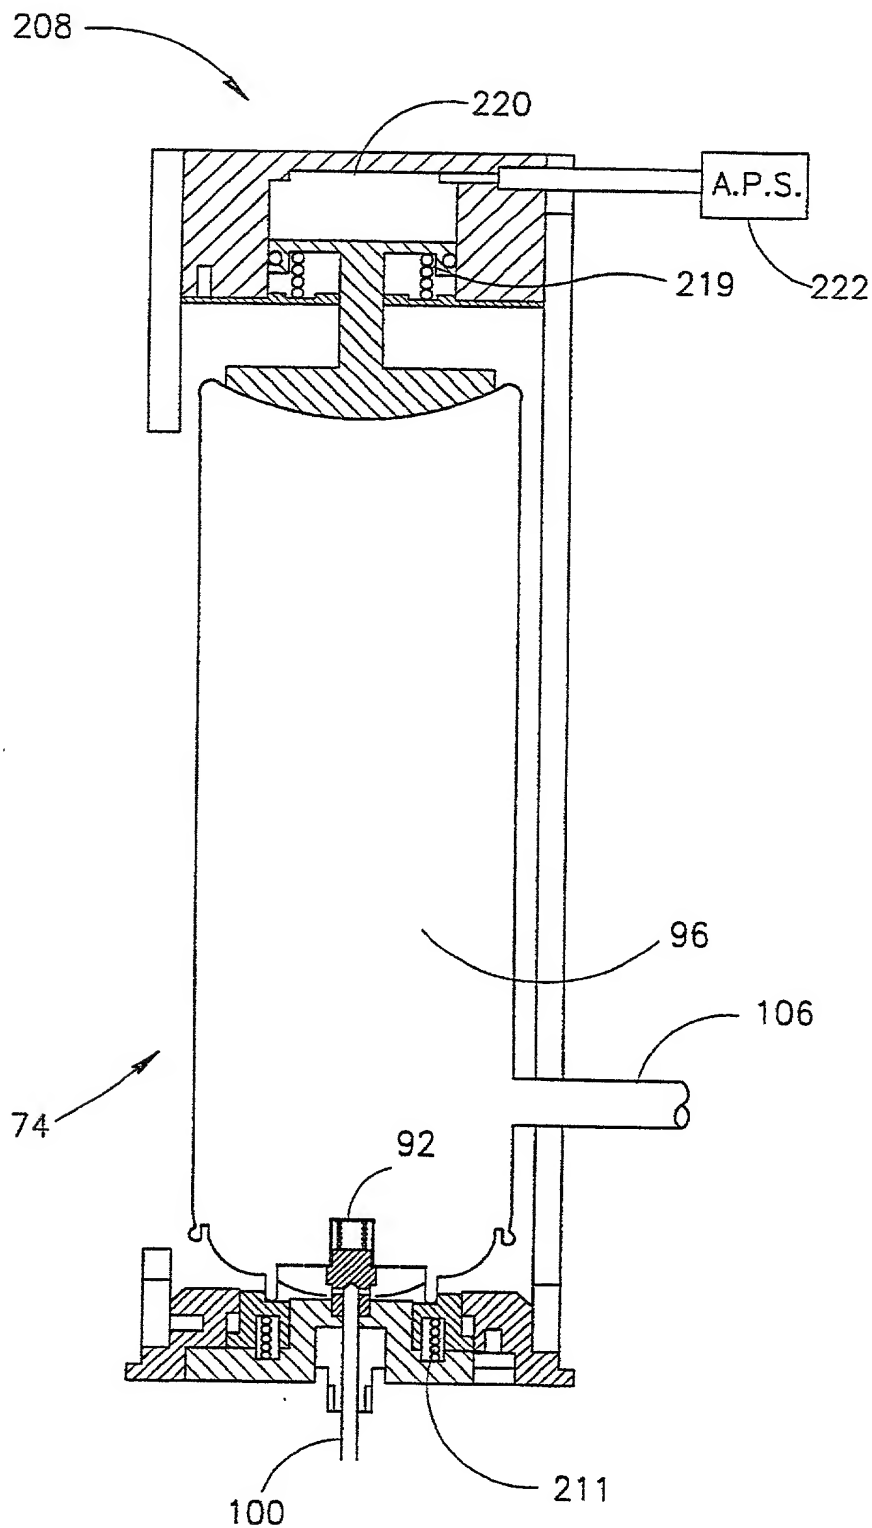


FIG.2A

5/12


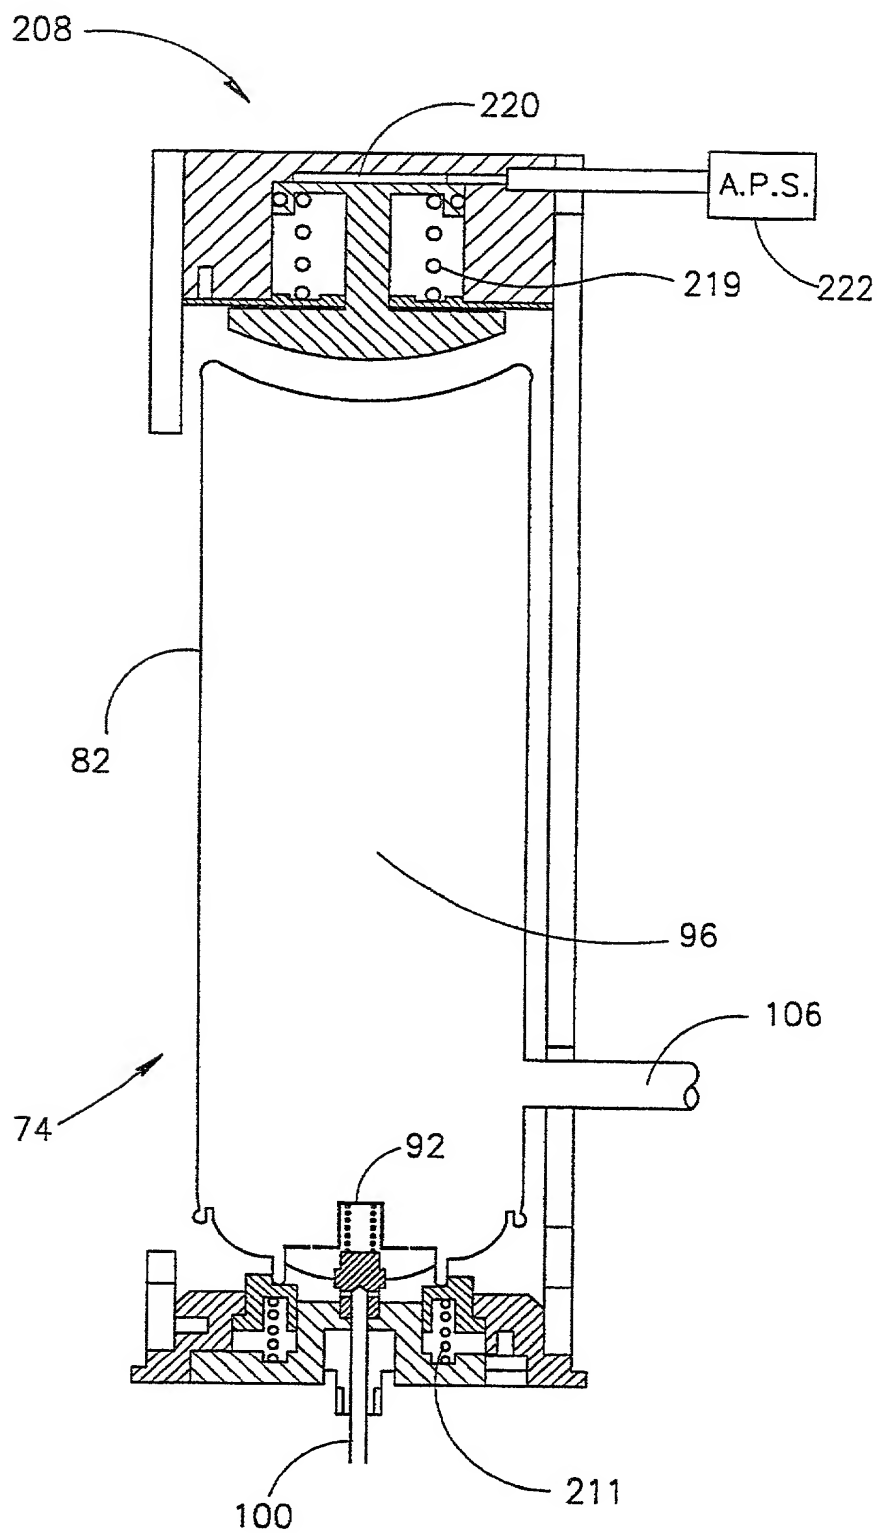


FIG. 2B

6/12



7/12

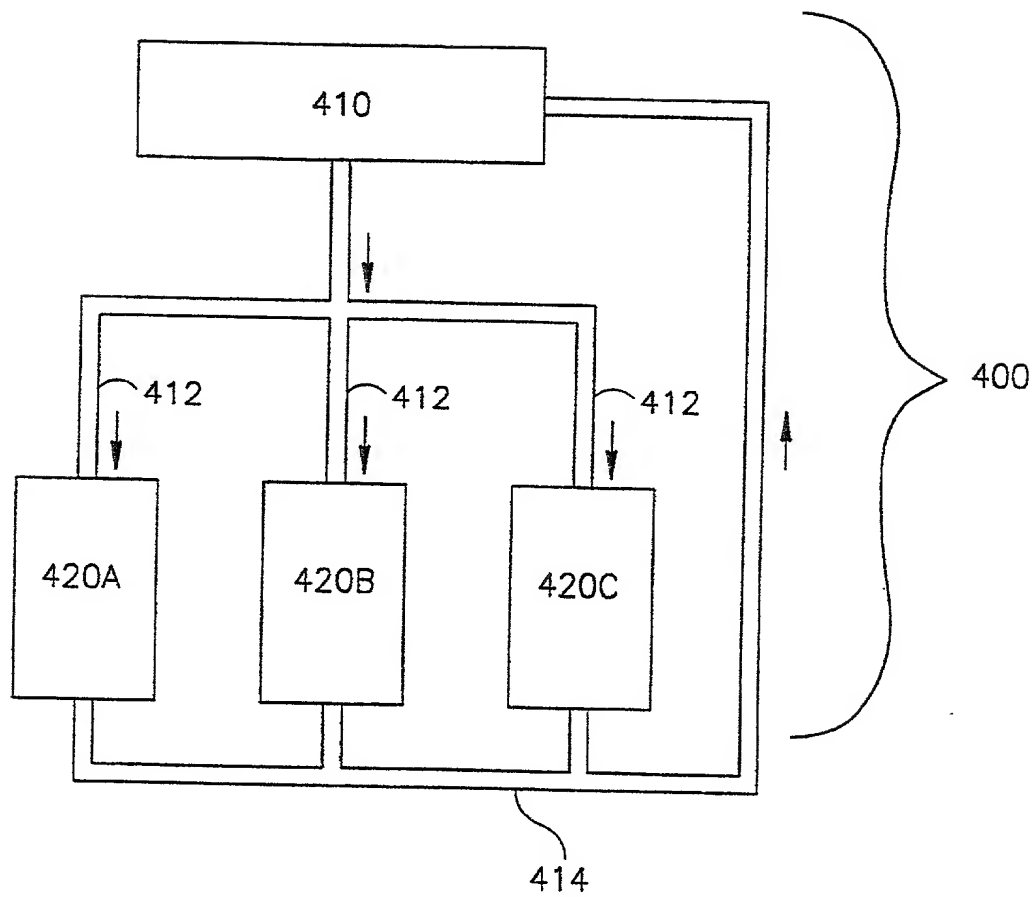


FIG.4A

8/12

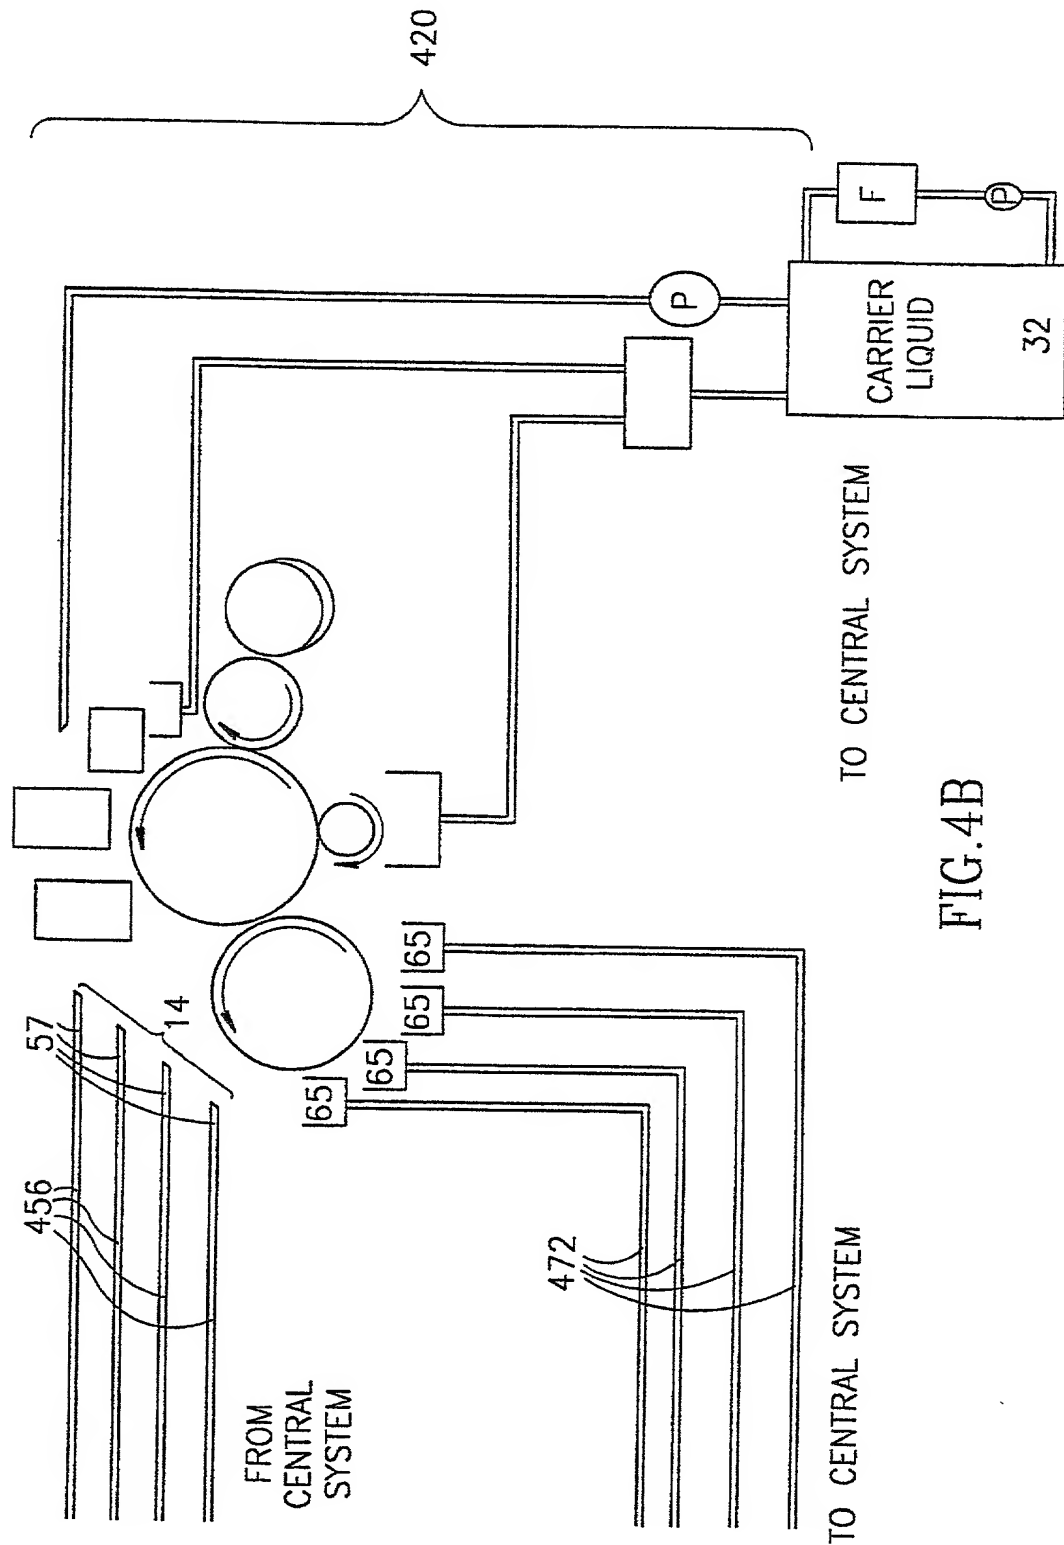


FIG. 4B

9/12

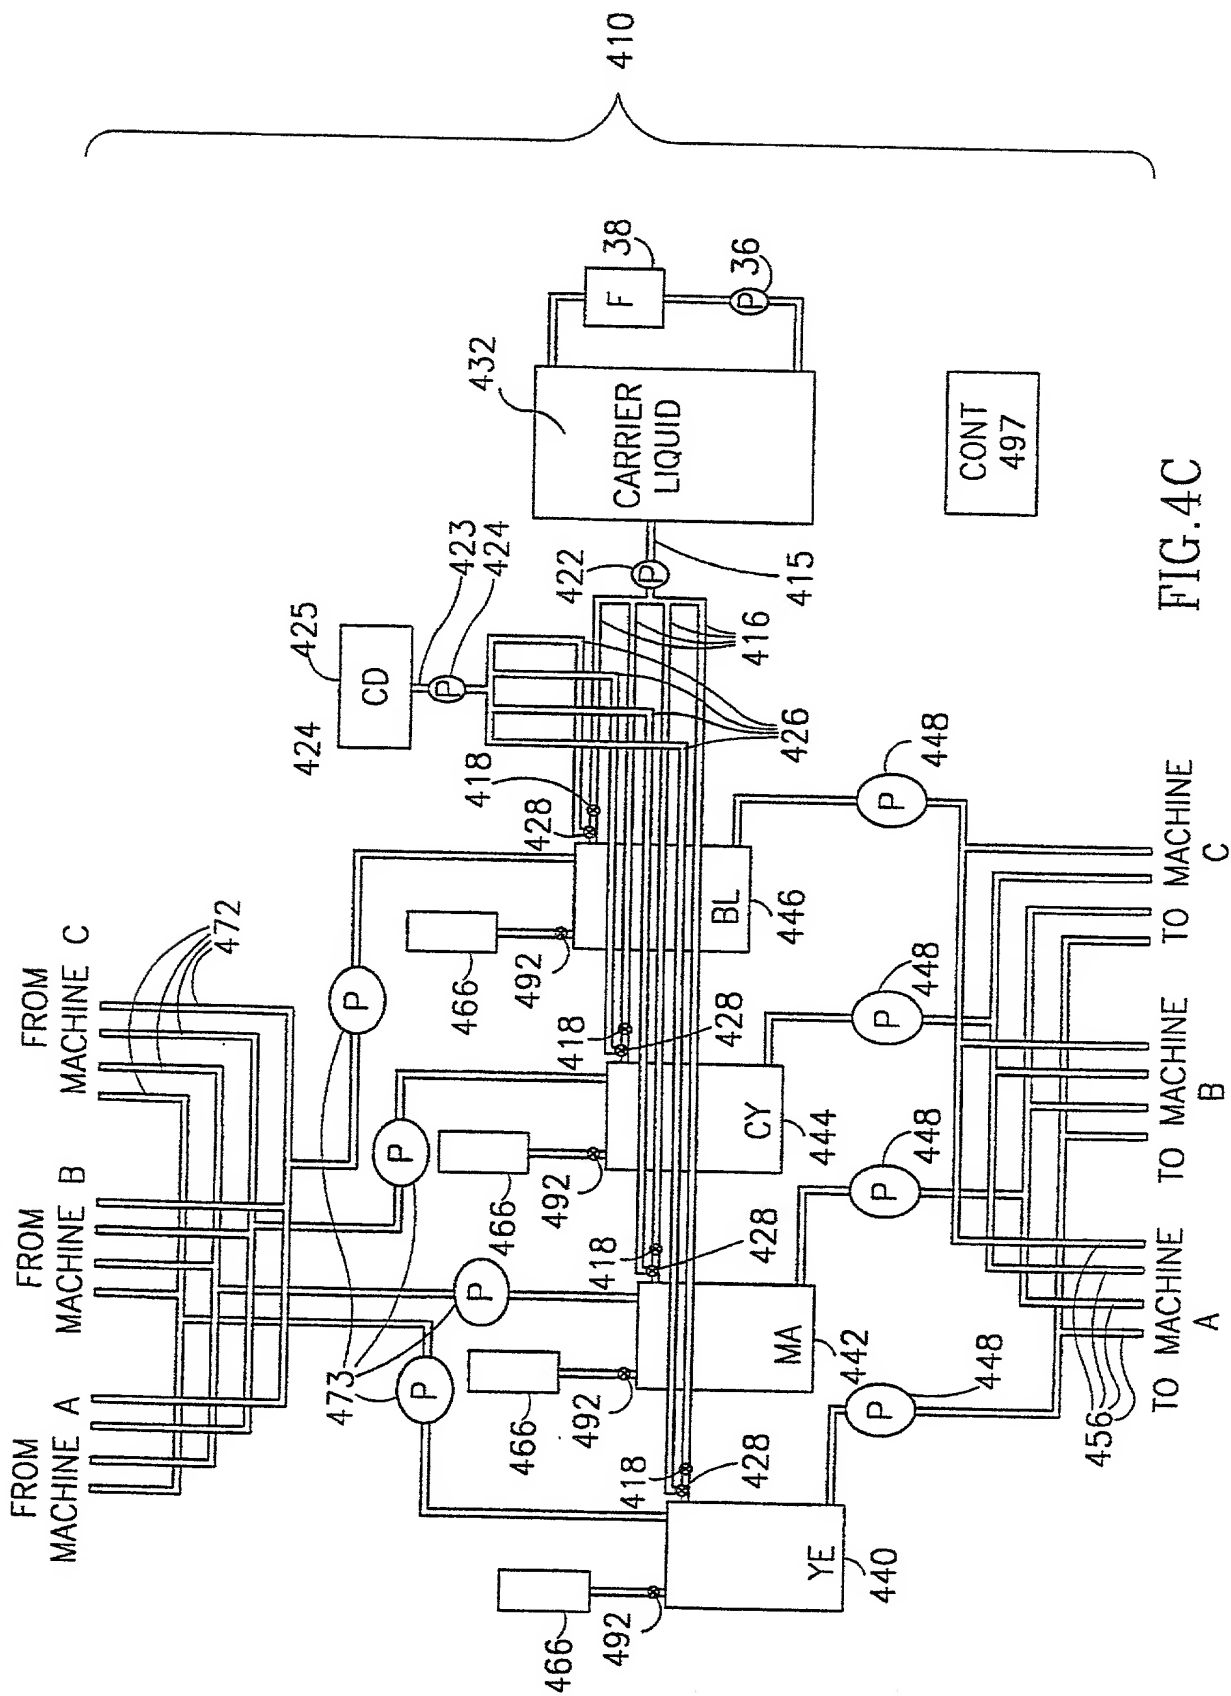


FIG. 4C

10/12

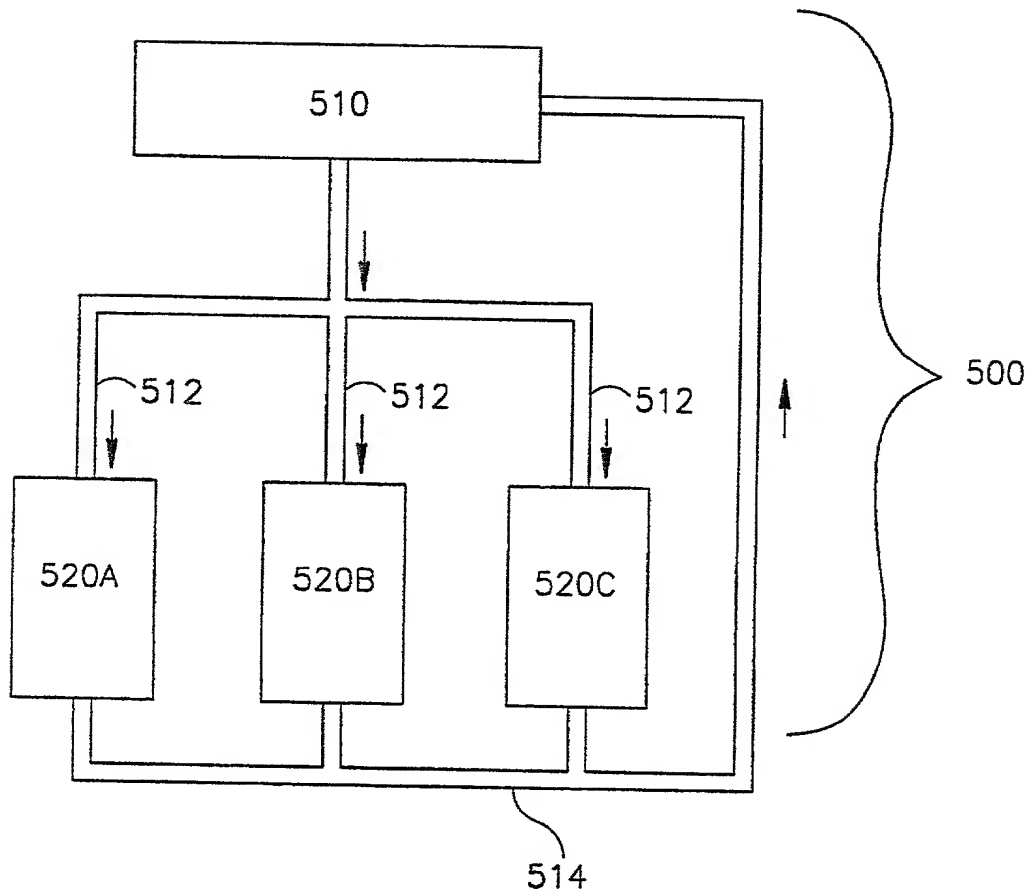


FIG.5A

11/12

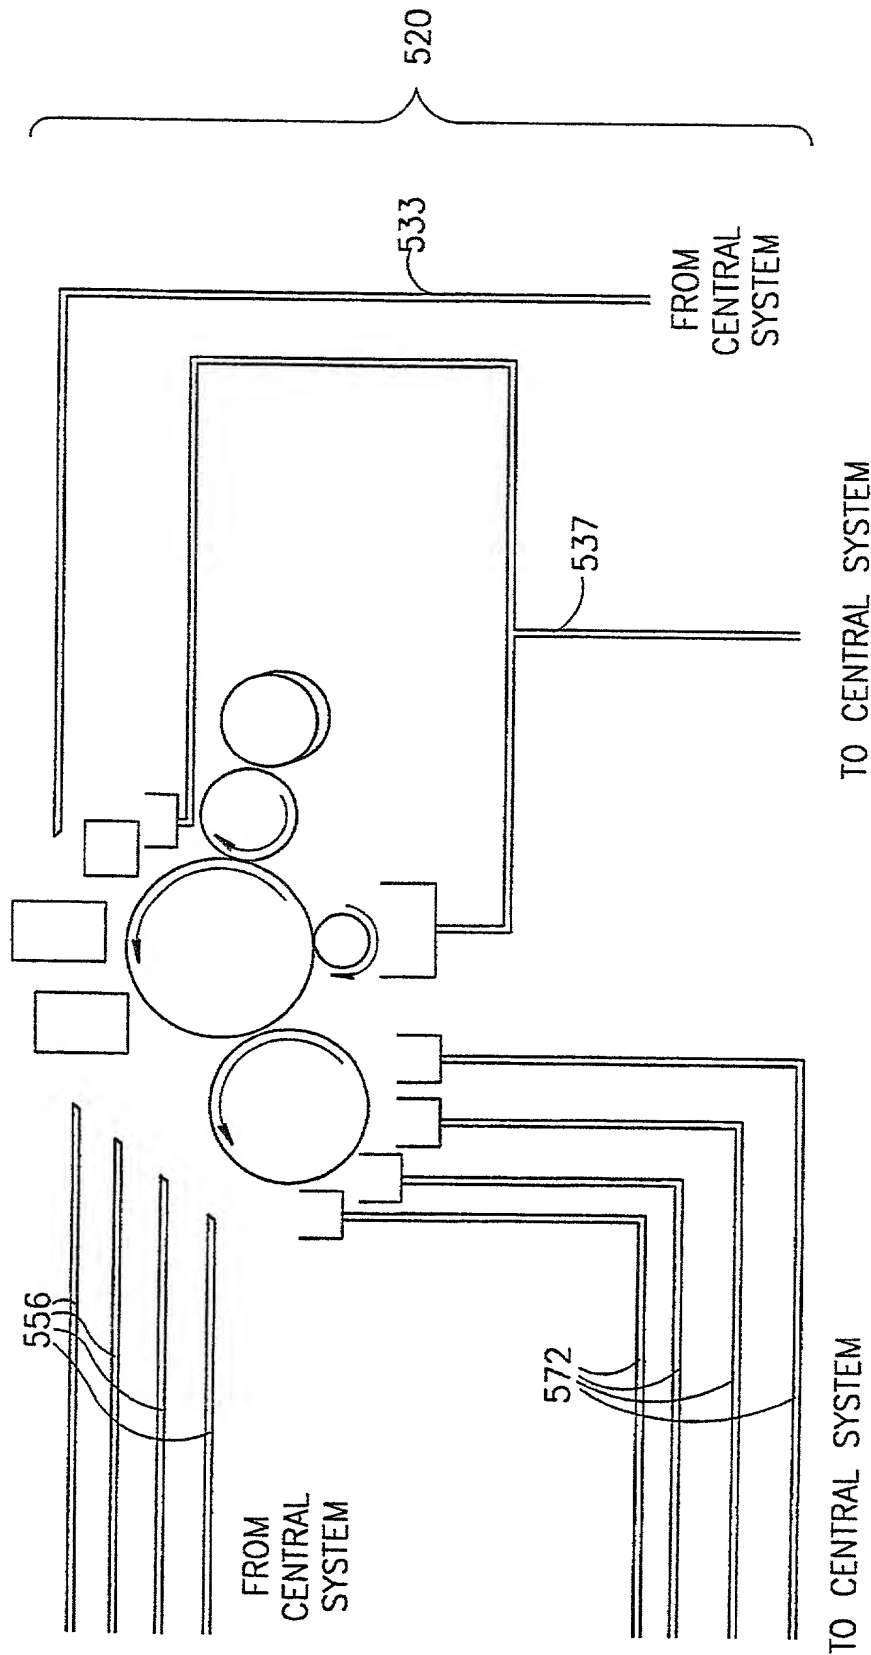


FIG.5B

12/12

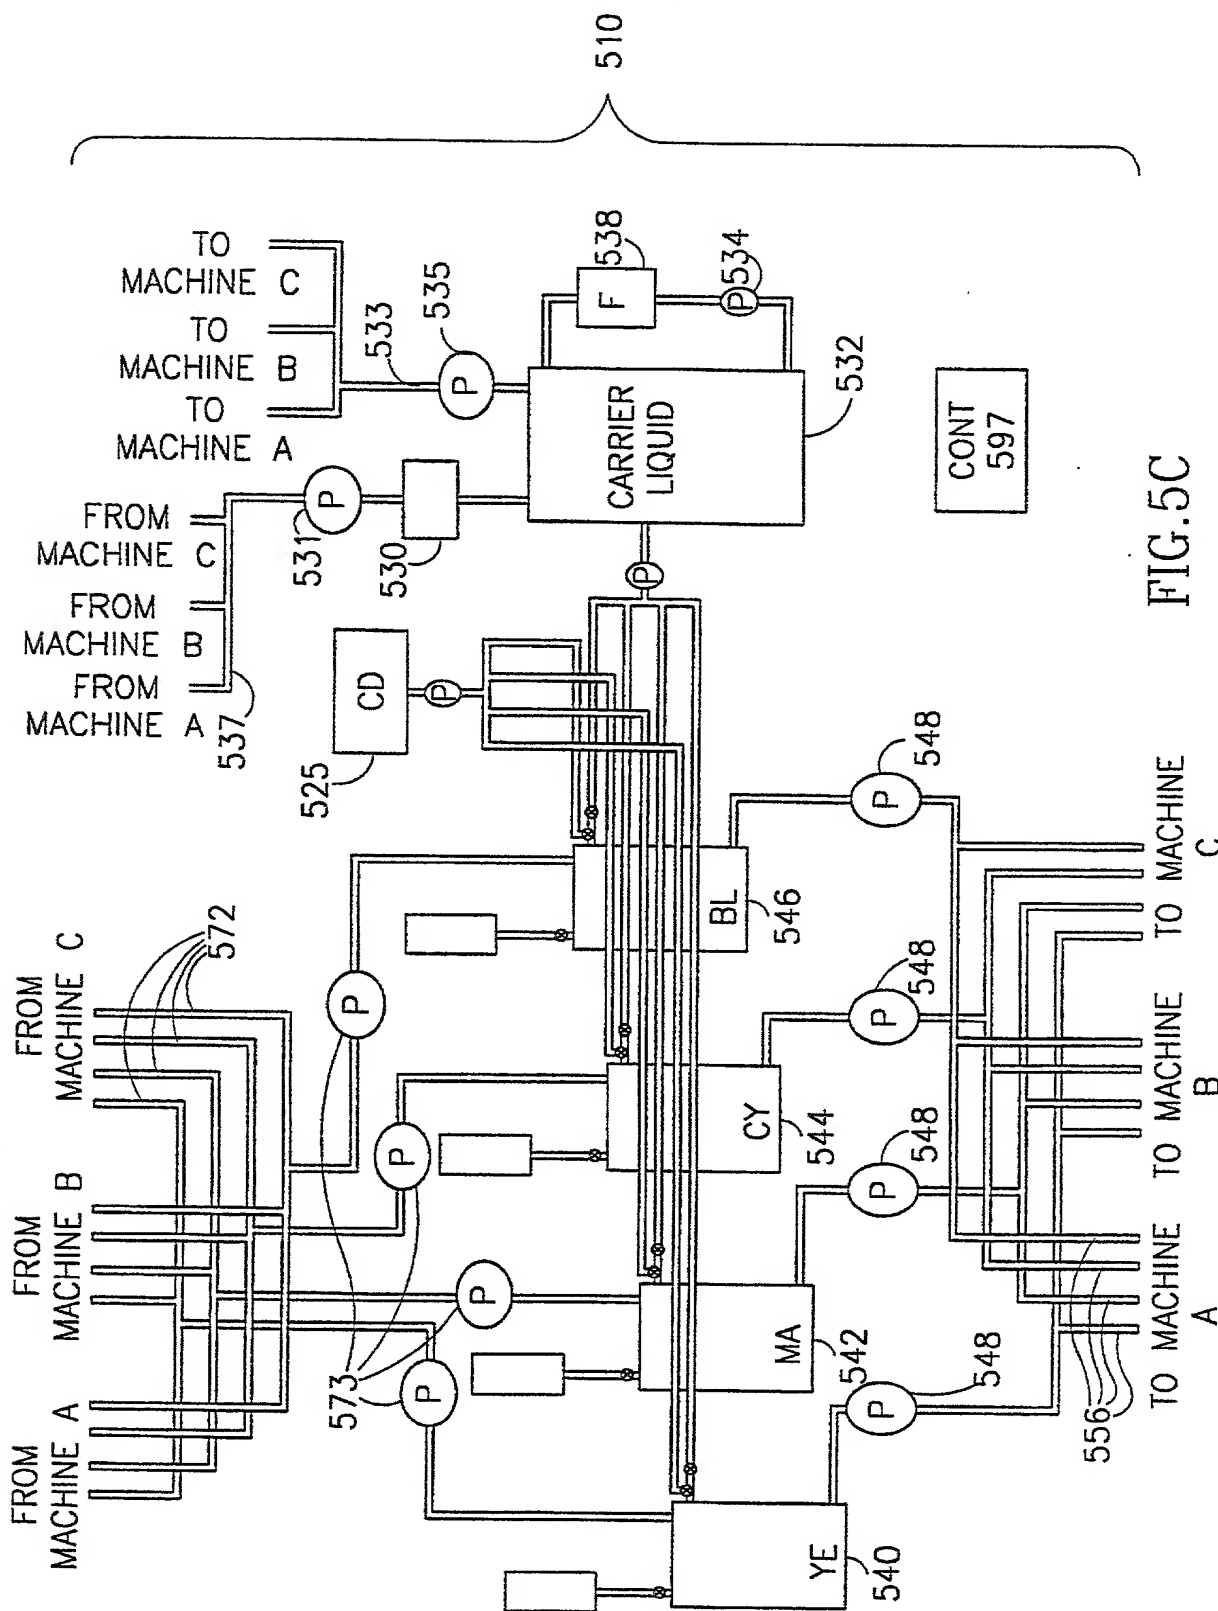


FIG. 5C

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

CENTRAL-INK SUPPLY SYSTEM FOR MULTI-PRINTER SYSTEMS

the specification of which

(check one).

☐ is attached hereto.

☒ was filed on July 18, 1999 as United States Application No. or PCT International Application Number PCT/IL99/00394

and was amended ~~on~~ as in the annexes to the IPR and Herewith

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R. Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Paul Fenster, Reg. No. 33,877

Maier Fenster, Reg. No. 41,016

Phillip A. Weiss, Reg. No. 19,863

Yaakov Schatz, Reg. No. 44,320

William H. Dippert, Reg. No. 26,723

Michael L. Wolfson, Reg. No. 24,750

R. Lewis Gable, Reg. No. 22,479

Send Correspondence to: William H. Dippert, Esq.
c/o Cowan, Liebowitz and Latman, P.C.
1133 Avenue of the Americas
New York, NY 10036-6799

Direct Telephone Calls to: (name and telephone number)
William H. Dippert (212) 790-9200

Full name of sole or first inventor
Benzion LANDA

Sole or first inventor's signature

Residence
26 Itamar Ben Avi Street, Kfar-Aharon, Nes-Ziona 74051, Israel

Citizenship
Israel

Post Office Address
26 Itamar Ben Avi Street, Kfar-Aharon, Nes-Ziona 74051, Israel

Full name of second inventor, if any
Yosel ROSEN

Second inventor's signature

Residence
315 Inbar Street, Moshav-Sitriya 76834, Israel

Citizenship
Israel

Post Office Address
315 Inbar Street, Moshav-Sitriya 76834, Israel

3-00

Full name of third inventor, if any Amit HENIG	
Third inventor's signature <i>x Amit Henig</i>	Date <i>12/1/02</i>
Residence 58 Ben Gurion Street, Or-Yehuda 60416, Israel	
Citizenship Israel	
Post Office Address 58 Ben Gurion Street, Or-Yehuda 60416, Israel	

4-00

Full name of fourth inventor, if any Gilad TZORI	
Fourth inventor's signature <i>Gilad</i>	Date <i>12/1/02</i>
Residence 270 Topaz Street, Sitriya 73272, Israel	
Citizenship Israel	
Post Office Address 270 Topaz Street, Sitriya 73272, Israel	

Full name of fifth inventor, if any	
Fifth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of sixth inventor, if any	
Sixth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	